




skoopia



skoopia 21Z30S




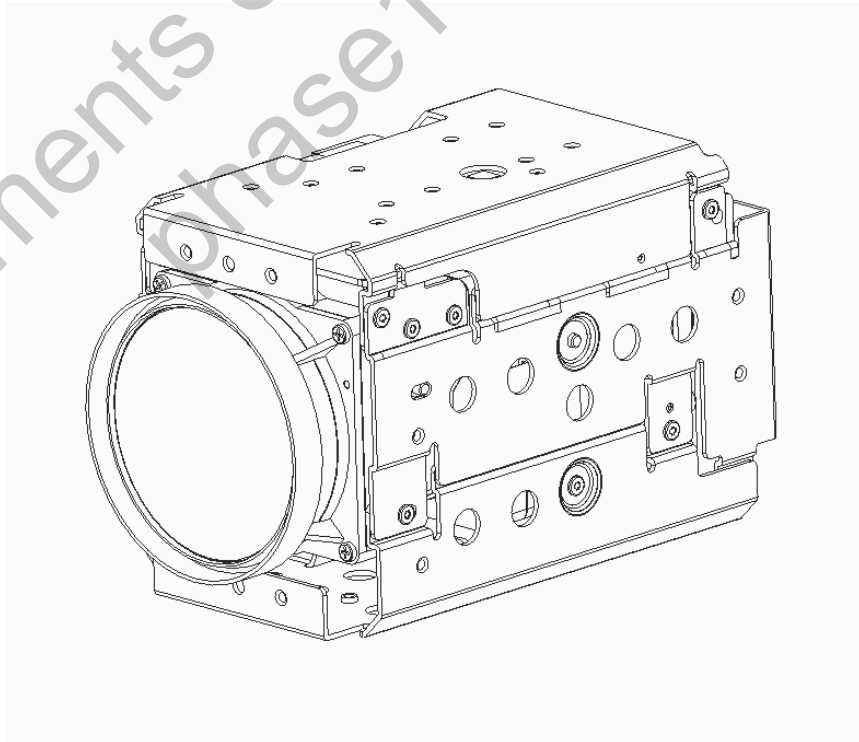

Revision History

| Version | Date | Description | Remarks |
|---------|------|---------------|---------|
| 1.00 | | First Release | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

| | | |
|--|---|---|
|  | <div style="background-color: black; color: white; padding: 2px;">CAUTION</div> <div style="border: 1px solid black; padding: 5px;">RISK OF ELECTRIC SHOCK DO NOT OPEN</div> |  |
| <p>CAUTION : TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER. ACCESSORIES SOLD DEPARATELY. CONTACT QUALIFIED SERVICE PERSONNEL FOR INFORMATION ACCESSIBLE ACCESSORIES.</p> | | |



The lightning arrowhead symbol in a triangle means to watch out for live wires that might cause an electrical shock.



The exclamation symbol in a triangle indicates an important operational and service instruction.

WARNING

Please note that the user is liable for any incidents in operating the unit if it is altered or modified without manufacturer’s approval.

CAUTION

To prevent electric shock and risk of fire hazards:
Do not use power sources except for that specified.



Do not expose this appliance to rain or moisture.

This installation should be made by a qualified service person and should abide to all local codes.

Compliments of Phase 1 Technology
phase1vision.com



1. SAFETY INSTRUCTIONS

Read Instructions

Read all of the safety and operating instructions before using the product.

Retain Instructions

Save this instructions for later use.

Cleaning

Unplug this appliance from wall outlet before cleaning. Do not use liquid cleaners or aerosol cleaners. Use a damp cloth for cleaning.

Water and Moisture.

Do not use this product near water or moisture.(For example. Near a bathtub, wash bowl, kitchen sink, or laundry tub, in a wet basement, or near swimming pool, etc.)

Installation

Do not place this product on an unstable cart, stand, or table. The product may fall causing serious injury to a child or adult, and damage to the product. Use only with a cart or stand recommended by the manufacturer, or sold with the product. Mounting should follow the manufacturer's instructions, and should use a mounting accessory recommended by manufacturer.

Power source

This Product should be operated only from the type of power source indicated on marking label.

If you are not sure of the type of power supplied to your home, consult your dealer or local power company



2. PRECAUTIONS

- **Do not use the camera in extreme temperature conditions.**

- **Do not use or store the camera in humid environment**

It may cause poor image quality.

- **Do not use the camera in unstable lighting conditions.**

Inconsistent lighting or flickering may cause poor image.

- **Never use the camera close to gas or oil leak.**

It may not operate properly.

- **Do not disassemble the camera.**

There is no user serviceable part inside.

- **Do not drop the camera or apply force on it.**

It may cause a malfunction.

- **Never face the camera to strong light for long periods of time.**

It may damage the CMOS sensor.

- **Do not expose the camera to rain or any types of liquid**

If wet, wipe the moisture out immediately.

Liquids can contain minerals that corrode the electronic components.



When this camera is installed near wireless communication devices that emits strong electromagnetic field, irregularity such as noise may appear in the image.



INDEX

| | |
|---|----|
| 1. SAFETY INSTRUCTIONS..... | 4 |
| 2. PRECAUTIONS..... | 5 |
| 3. FEATURES..... | 7 |
| 4. SPECIFICATION..... | 9 |
| 5. OPERATING CAMERA..... | 10 |
| 5.1. Camera OSD menu..... | 10 |
| 5.2. WHITE BALANCE..... | 12 |
| 5.3. EXPOSURE..... | 13 |
| 5.4. FOCUS..... | 13 |
| 5.5. BACK LIGHT..... | 14 |
| 5.6. IMAGE CONTROL..... | 14 |
| 5.7. DISPLAY CONTROL..... | 15 |
| 5.8. SYSTEM SETUP..... | 16 |
| 5.9. RESET..... | 16 |
| 6. Video Output..... | 16 |
| 6.1. Video Mode..... | 16 |
| 6.2. Output Timing Chart(1920x1080p@30/60/29.97/59.94)..... | 18 |
| 6.3. Output Timing Chart(1920x1080p@25/50)..... | 19 |
| 6.4. Output Timing Chart(1920x1080i@60/59.94)..... | 20 |
| 6.5. Output Timing Chart(1920x1080i@50)..... | 21 |
| 6.6. Output Timing Chart(1280x720p@60/59.94)..... | 22 |
| 6.7. Output Timing Chart(1280x720p@50)..... | 23 |
| 6.8. Output Timing Chart(1280x720p@30/29.97)..... | 24 |
| 6.9. Output Timing Chart(1280x720p@25)..... | 25 |
| 6.10. Video Data Start/Stop Format..... | 26 |
| 7. Camera Interface..... | 27 |
| 7.1. Camera Interface..... | 27 |
| 7.2. LVDS Interface..... | 29 |
| 7.3. Application of recommended circuit Camera Reception..... | 31 |
| 7.4. Key Application recommended circuit..... | 33 |
| 8. Dimensions..... | 34 |
| APPENDIX A..... | 35 |
| APPENDIX B..... | 63 |



3. FEATURES

- 1/2.8 inch Sony STARVIS CMOS image sensor (approx. 2.1 million effective pixels)

Progressive scan

- WDR (Wide Dynamic Range) Function

- Video signals output

HD LVDS : Digital ITU-R BT.1120 - YcbCr4:2:2 16bits

Analog : SD CVBS (NTSC/ PAL), 1.0Vp-p 75Ω, Composite

HD SDI:

| | |
|-----------------------|-----------------------------------|
| SMPTE 292M(1.485Gbps) | 1920x1080p@25/30/29.97 |
| | 1920x1080i@50/60/59.94 |
| | 1280x720p@25/30/50/60/29.97/59.94 |
| SMPTE 424M(2.97Gbps) | 1920x1080p@50/60/59.94 |

- 30x optical zoom lens with F1.5 aperture(optical zoom + digital zoom = 360x)

- Day and Night

ICR for infrared cut filter

- Privacy Zone Masking function

- Communications protocol supported to be controlled remotely

-SONY-VISCA, PELCO-P/D, etc

- High performance functions

-3D-DNR (Digital Noise Reduction)

-BLC (Back Light Compensation)

-Motion Detection

-Defog

-Image flip

-HLC (High Light Compensation)



4. SPECIFICATION

Compliments of Phase 1 Technology
phase1vision.com



| 21Z30L | | SPECIFICATIONS | |
|---------------|---|--|---|
| Sensor | Image Sensor | 1/2.8" Progressive CMOS (2.1 mega) | |
| | Scanning System | 16:9 Progressive | |
| | Sync. System | Internal | |
| | Effective Pixel | 1920(H) x 1080(V) | |
| | Min. Illumination | 0.05Lux (Day), 0.005Lux (Night), 0.0005Lux(DSS on) | |
| | Horizontal Resolution | 1000 TVL | |
| Optics | Lens | 30x optical Zoom, F=4.7~141 mm, F1.5(Wide) ~ F4.0(Tele) | |
| | Zoom | 30x optical zoom + 12x digital zoom = 360x | |
| | Focus | Near/Far, Auto/Manual/One Push | |
| | Angle of View(H) | 60.5 degrees (wide end), 2.3 degrees (tele end) | |
| | Min. working distance | T.B.D | |
| Functions | Back Light Compensation | WDR, BLC, HLC(High Light compensation) | |
| | Exposure | Auto / Manual | |
| | White Balance | Auto(3,000°K~8,000°K) / ATW(1,900°K~11,000°K) / Manual | |
| | Day & Night System | AGC / TDN(ICR) | |
| | Electronic Shutter | NTSC: 1/30~1/10000, PAL: 1/25~1/10000, DSS(~ 1/1sec) | |
| | Functions | Privacy Mask, Image Mirror, 3DNR, Flicker-less, Sharpness, Defog, DIS(Digital Image stabilizer), NegArt, Freeze | |
| Video Outputs | Digital Output (LVDS) ITU-R BT.1120 YcbCr4:2:2 16bits | 1920x1080p@25/30/50/60/29.97/59.94 1920x1080i@50/60/59.94 1280x720p@25/30/50/60/29.97/59.94 | |
| | SDI | SMPTE 292M(1.485Gbps): 1080p@25/30/29.97 1080i@50/60/59.94 720p@25/30/29.97/50/60/59.94 SMPTE 424M(2.97Gbps): 1080p@50/60/59.94 | |
| | CVBS | Analog Composite(1V ± 0.2 Vp-p) NTSC/PAL | |
| | Control Interface | UART(5V level) | PELCO-P/D, SONY-VISCA protocol 8bits data, 1 stop bit, no parity, 2400~115200bps |
| | | Operation Temperature | T.B.D |
| General | Power Input | 12VDC (7V to 15VDC) | |
| | Power consumption | Max 5W (3.2W Lens inactive, 3.9W Lens active) | |
| | Mass | Approx. 250g (8.8 oz.) | |
| | Dimensions | 96.6(D) x 50.0(W) x 60.0(H) mm | |



5. OPERATING CAMERA

5.1. Camera OSD menu

| | | | | |
|------------|---------------|---|--------------|---------|
| WB CONTROL | MODE | AWB / ATW / PUSH / INDOOR / OUTDOOR / MANUAL | | |
| | PUSH | | | |
| | RED | 0 ~ 100 | | |
| | BLUE | 0 ~ 100 | | |
| AE CONTROL | MODE | AUTO/SHUT PRI/IRIS PRI/AGC PRI/BRIGHT/MANUAL | | |
| | SHUT | / 30/60/90/100/125/180/250/350/500/725/1000/1500/2K/3 K/4K/6K/10K | | |
| | IRIS | F1.6 ~ F16 | | |
| | AGC | 0 dB ~ | | |
| | AGC LIMIT | 0 ~ 15 | | |
| | SENS UP | OFF ~ X15 | | |
| | EXP COMP | 0 ~ 14 | | |
| | FLICKERLESS | OFF/ AUTO/ ON | | |
| | FOCUS CONTROL | FOCUS MODE | AUTO/ MANUAL | |
| | PUSH | PRESS OK | | |
| | AF MODE | NORMAL/ INTERVAL/ ZOOM TRIG | | |
| | WIDE LIMIT | X1 ~X29 | | |
| | TELE LIMIT | X2 ~X30 | | |
| | DZOOM | OFF/ ON | | |
| | ZOOM SPEED | 0 ~ 7 | | |
| | NEAR LIMIT | 0.5M/ 1M/ 2M/ 3M/ 5M/ 10M/ 30M | | |
| | AF INTERVAL | 0 ~ 255 | | |
| BACK LIGHT | BACKLIGHT | BLC | LEVEL | 0~255 |
| | | | DISPLAY | OFF/ ON |
| | | | WIDTH | 0~48 |
| | | | HEIGHT | 0~33 |
| | | | MOVE HOR | 0~48 |
| | | | MOVE VER | 0~33 |
| | HLM | AREA DISPLAY | OFF/ ON | |
| | | LEVEL | 0~20 | |
| | | BLACK MASK | OFF/ ON | |
| | | WIDTH | 0~48 | |
| | | HEIGHT | 0~33 | |
| | | MOVE HOR | 0~48 | |
| | SPOT AE | DISPLAY | OFF/ ON | |
| | | WIDTH | 0~48 | |
| | | HEIGHT | 0~33 | |
| | | MOVE HOR | 0~48 | |
| | | MOVE VER | 0~33 | |



| | | | | |
|---------------|----------------|----------------------------|--|--|
| | WDR | OFF/ ON | | |
| | DWDR | STRENGTH | 0 ~ 16 | |
| | | SATURATION | 0 ~ 16 | |
| | | LOCAL RATIO | 0 ~ 16 | |
| | | SAT. SYNC | OFF/ ON | |
| | | AUTO LEVEL | LOW/ MID/ HIGH | |
| | DEFOG | STRENGTH | 0 ~ 16 | |
| | | THRESHOLD | 0 ~ 3 | |
| | | AUTO LEVEL | LOW/ MID/ HIGH | |
| IMAGE CONTROL | COLOR LEVEL | 0 ~ 20 | | |
| | SHARPNESS | 0 ~ 20 | | |
| | CONTRAST | 0 ~ 20 | | |
| | HUE | -10 ~ 0 ~ 10 | | |
| | IMAGE EFFECT | OFF/ NEGA/ GRAY | | |
| | IMAGE FLIP | OFF/MIRROR/V-FLIP/ROTATION | | |
| | DNR | MODE | OFF/ 2D/ 3D/ 2D+3D | |
| | | 3DNR LEVEL | LOW/MID/HIGH/AUTO | |
| | | 2DNR LEVEL | LOW/MID/HIGH/AUTO | |
| | | APERTURE | 0~4 | |
| | GAMMA | DEFAULT/1.0 ~ 0.4 | | |
| | GAMMA OFFSET | -64 ~ 64 | | |
| | COLOR SUPPRESS | OFF/ LOW/ MID/ HIGH | | |
| LENS SHADING | OFF/ ON | | | |
| DISPLAY | DAY/NIGHT | MODE | AUTO/ DAY/ NIGHT | |
| | | DELAY [SEC] | 0 ~ 60 | |
| | | D->N LEVEL | 0 ~ 28 | |
| | | N->D LEVEL | 0 ~ 27 | |
| | | NIGHT COLOR | OFF/ ON | |
| | | COLOR BURST | OFF/ ON | |
| | CAM TITLE | OFF/ ON | | |
| | ZOOM MAG | OFF/ ON | | |
| | PRIVACY | MODE | OFF/ ON | |
| | | TYPE | SQUARE/ POLYGON | |
| | | MASK NO. | MASK1 ~ MASK8 | |
| | | DISPLAY | OFF/ ON | |
| | | COLOR | BLK/WHT/GRN/BLE/RED/CYAN/MAG/YEL/G RAY1~6,MOSAIC | |
| | | POLY SELECT | L-TOP/ R-TOP/ L-BOT/ R-BOT | |
| | | POSITION HOR | 0~255 | |
| | | POSITION VER | 0~216 | |



| | | | |
|--------------|------------------|---|---------|
| | | WIDTH | 0~120 |
| | | HEIGHT | 0~68 |
| | MOTION | AREA | 1 ~ 4 |
| | | AREA ACTIVE | OFF/ ON |
| | | AREA DISPLAY | OFF/ ON |
| | | SIZE POSITION | |
| | | SENSITIVITY | 0 ~ 40 |
| | | MOTION VIEW | OFF/ ON |
| | DEFECT PIXEL | OFF/ON/STATIC/FIXED | |
| | IMAGE STABILIZER | OFF/ ON | |
| SYSTEM SETUP | CAM ID | 1 ~ 255 | |
| | ID DISPLAY | OFF/ON | |
| | BAUDRATE | 2400/4800/9600/19200/38400/115200 | |
| | OUTPUT FORMAT | 1080P60/50/30/25/ 1080i60/50 720P/60/50/30/25 | |
| | VER. | | |
| RESET | MODE | FACTORY / USER | |
| EXIT | | | |

5.2. WHITE BALANCE

AWB : Color temperature is automatically adjusted to 3,000°K ~ 8,000°K

ATW : Color temperature is automatically adjusted to 1,900°K ~ 11,000°K

INDOOR : Color temperature is manually adjusted to indoor

OUTDOOR : Color temperature is manually adjusted to outdoor

MANUAL WB : Color Temperature is manually adjustable to adjusting value.

RED and BLUE gain can be changed for better pictures.

PUSH WB : Color Temperature is manually adjustable to adjusting value.

The One Push White Balance mode is a fixed white balance mode that may be automatically readjusted

only at One Push Trigger, while the camera is directed at a piece of white paper to obtain the optimum

state under current illumination.

One Push White Balance data is lost when the power is turned off. If the power is turned off, reset One Push White Balance.



5.3. EXPOSURE

MODE :

AUTO - Iris, gain and shutter can be controlled automatically.

MANUAL - Manual control of Iris, gain and shutter.

SHUTTER Priority - Manual control of shutter. Iris and gain can be controlled automatically.

IRIS Priority - Manual control of IRIS. Shutter and gain can be controlled automatically.

BRIGHT - Iris and gain can be controlled by control of brightness

SHUTTER :

Auto - Shutter controls exposure automatically when iris is manual.

Manual - Shutter is fixed, and gives the exposure control priority to other resources.

IRIS :

Auto - Iris controls exposure automatically, and shutter is fixed.

Manual - Iris is fixed, and gives the exposure control priority to other resources.

AGC LIMIT: To select maximum automatic gain limit.

Camera raises up gain to selected gain limit when dark conditions.

EXP COMP :

The exposure compensation function adjusts gain and iris, to keep a brightness level.

SENS UP :

Minimum slow shutter limit is down to 1/1 second.

The value means seconds.

Camera make Shutter speed longer to selected shutter limit when dark conditions.

FLICKERLESS :

This function used only for specific country to remove light flickering when light appears to flutter.

5.4. FOCUS

The camera employs a 30x optical zoom lens combined with a 12x digital zoom function. This camera

allows you to zoom up to 360x.

Optical 30x, f = 4.7 mm to 141 mm (F 1.5 to F 4.0)

Digital Zoom 12x : enlarges of the subject

7 levels of zoom speed

FOCUS MODE :

Auto mode automatically adjusts the focus position.



Manual mode adjusts the focus position by manual and when zoom is changed.

AF MODE :

Normal mode automatically adjusts the focus position.

Interval mode adjusts the focus position at time interval and when zoom is changed.

Zoom trig mode adjusts the focus position when zoom is changed.

ONE PUSH : When One Push AF command is sent, camera becomes Auto Focus mode to adjust focus

position for a while. After it stops, mode becomes that for Manual focus mode.

NEAR LIMIT : Priority for focusing distance. The lens moves to adjust the focus from the distance.

5.5. BACK LIGHT

BACKLIGHT : When background is too bright behind the object, the BLC make clearer object.

HLM - Highlight suppression reduce too bright light by masking it with specific color.

WDR : When background is too bright behind the object, the WDR make clearer images of the

background as well as the object. Wide dynamic range produce images that combining long-exposure

signals (normal shutter) with the signals of the high-intensity portions obtained with a short exposure

(high-speed shutter).

DWDR : Dark areas of image brightness correction.

DEFOG : This function affects the effect of fog removal. Furthermore, it improves visibility by removing fog, clouds, smoke, and dust.

5.6. IMAGE CONTROL

COLOR LEVEL

Color level is the colorfulness of a color relative to its own brightness.

SHARPNESS

As you increase this value, the picture outline becomes stronger and clearer. Adjust this value

appropriately depending on the sharpness of the picture.

IMAGE FLIP

Video output is set horizontally vertically, and rotate.



DNR

2D/3DNR reduces video noises at low ambient light.

SHADING

Image center and the outskirts of brightness difference correction

GAMMA

Video out brightness correction function

COLOR SUPPRESS

Color suppress reduces color noise in low illumination conditions.

5.7. DISPLAY CONTROL

DAY / NIGHT

- **AUTO** : Auto day/night mode automatically switches between Color and Black/White depending on darkness. ICR(IR cut) filter is removed when it switches to black/white.
D->N level - This level is threshold for switching day to night.
N->D level - This level is threshold for switching night to day.
Delay(Dwell) time - Checking time for condition of light to confirm changing to Color and Black/White.
Color Burst - Color burst off makes that the color burst is removed when ICR switches to black/white.
- **DAY** : The camera keeps color mode constantly.
- **NIGHT** : The camera keeps black/white mode constantly.

CAM TITLE

OSD character camera name settings..

ZOOM MAGNIFICATION

Display the Zoom scale.

PRIVACY

It is possible to set the size of the area and a video Mask.

MOTION

Video zone settings and sensitivity can be set.

IMAGE STABILIZER

This function reduces image blurring associated with the motion of a camera.



5.8. SYSTEM SETUP

CAM ID

The camera is capable of recognizing number setting up 1 to 255.

BAUDRATE

Camera communication bit rate.

OUTPUT FORMAT

Video output specification set(NTSC/PAL) and video size settings(1080p/720p)


5.9. RESET

Camera returns into initial value except ID and baudrate.



Compliments of Phase 1 Technology
phase1vision.com



6.2. Output Timing Chart(1920x1080p@30/60/29.97/59.94)

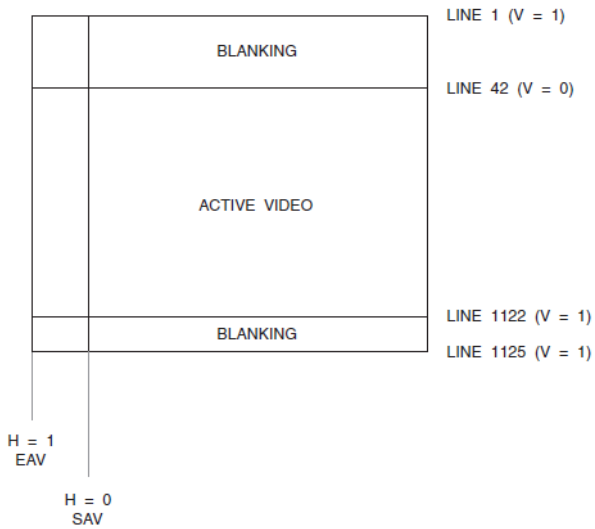


| LINE NUMBER | F | V |
|-------------|---|---|
| 1-41 | 0 | 1 |
| 42-1121 | 0 | 0 |
| 1122-1125 | 0 | 1 |

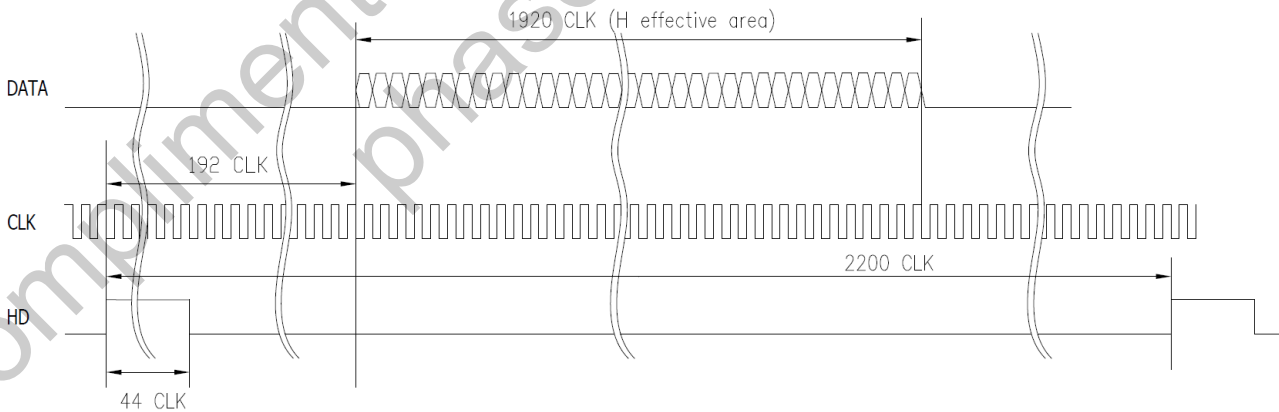
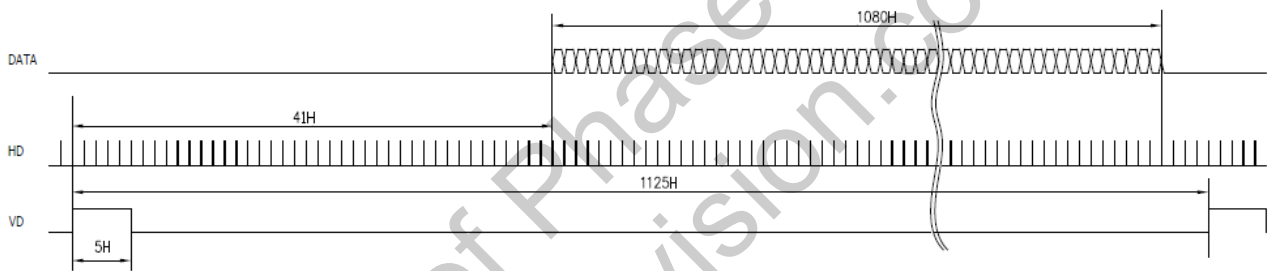




6.3. Output Timing Chart(1920x1080p@25/50)

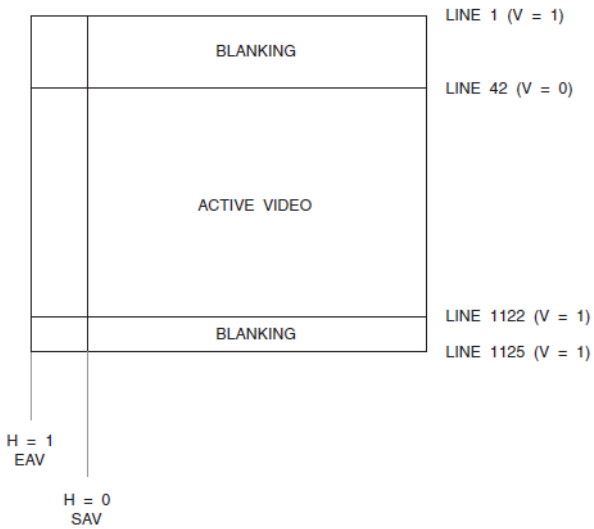


| LINE NUMBER | F | V |
|-------------|---|---|
| 1-41 | 0 | 1 |
| 42-1121 | 0 | 0 |
| 1122-1125 | 0 | 1 |

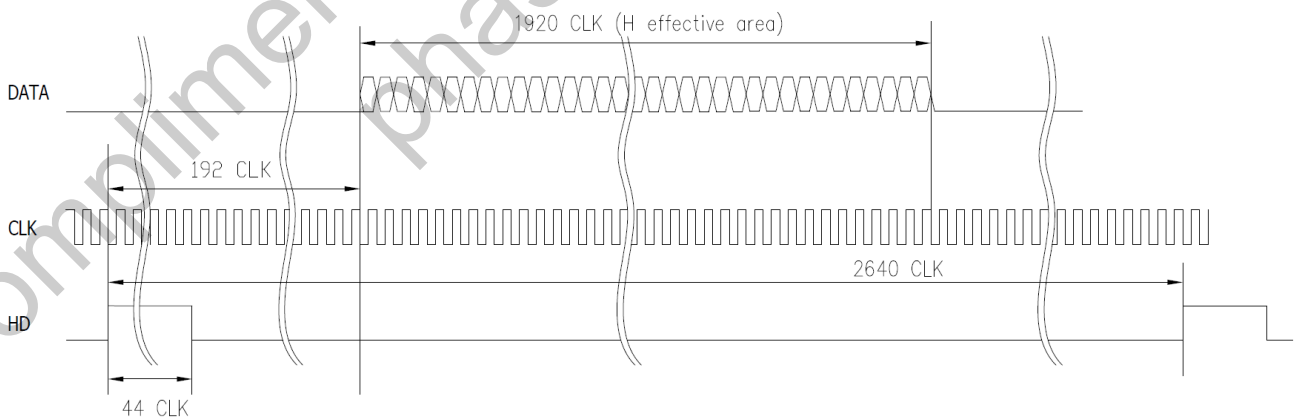
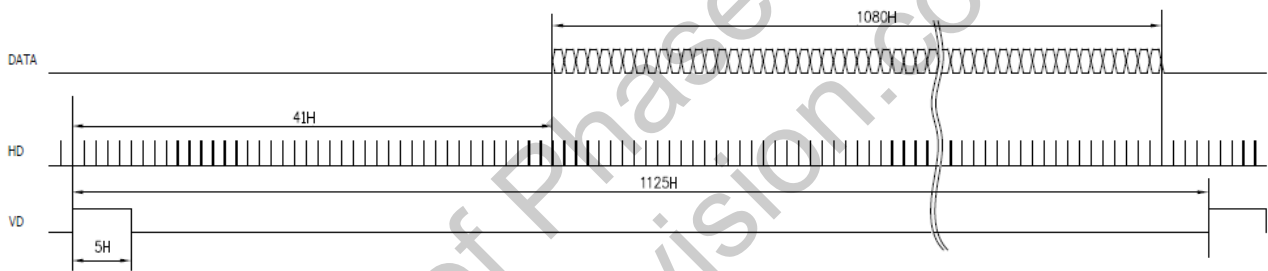




6.4. Output Timing Chart(1920x1080i@60/59.94)

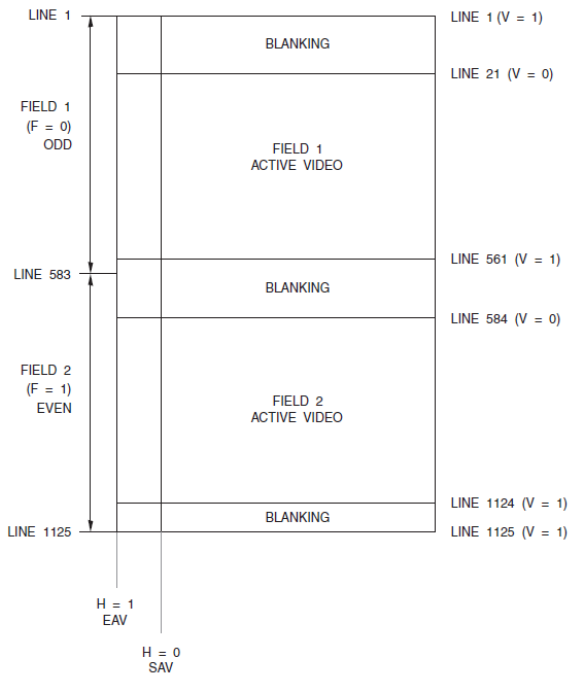


| LINE NUMBER | F | V |
|-------------|---|---|
| 1-20 | 0 | 1 |
| 21-560 | 0 | 0 |
| 561-562 | 0 | 1 |
| 563-583 | 1 | 1 |
| 584-1123 | 1 | 0 |
| 1124-1125 | 1 | 1 |

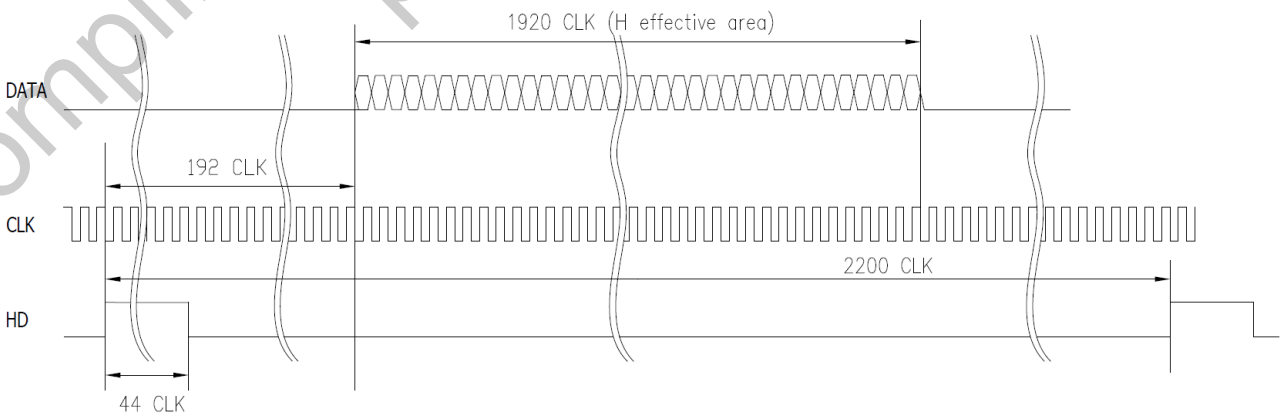
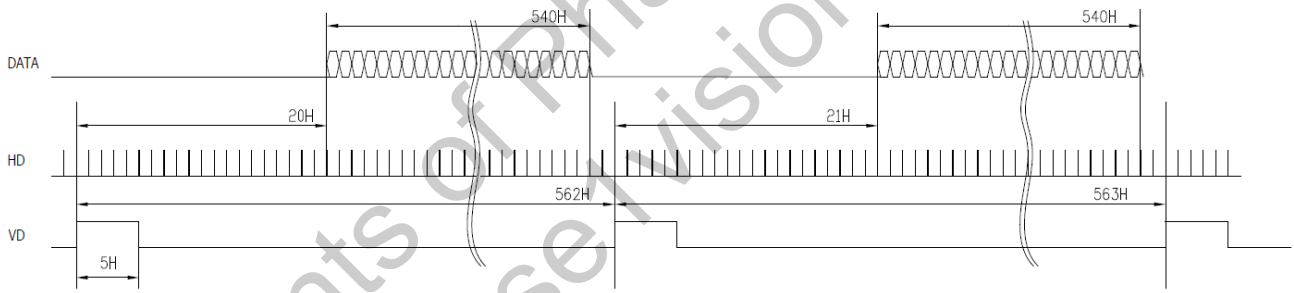




6.5. Output Timing Chart(1920x1080i@50)

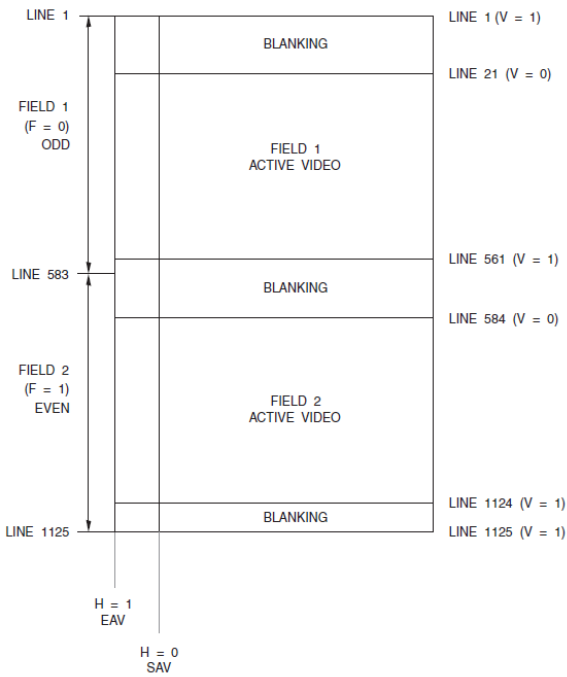


| LINE NUMBER | F | V |
|-------------|---|---|
| 1-20 | 0 | 1 |
| 21-560 | 0 | 0 |
| 561-562 | 0 | 1 |
| 563-583 | 1 | 1 |
| 584-1123 | 1 | 0 |
| 1124-1125 | 1 | 1 |

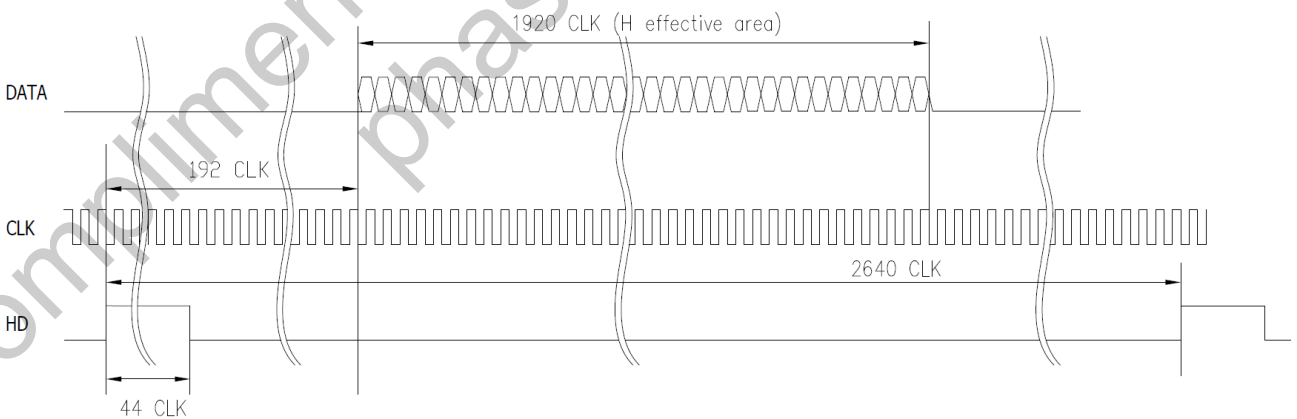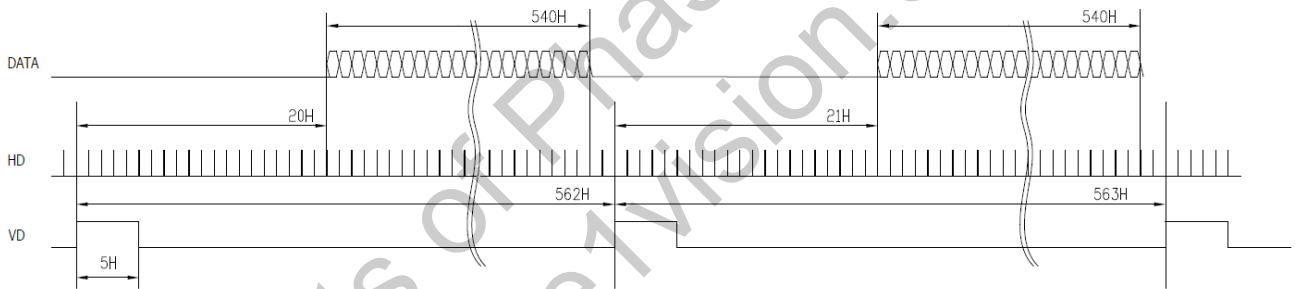




6.6. Output Timing Chart(1280x720p@60/59.94)

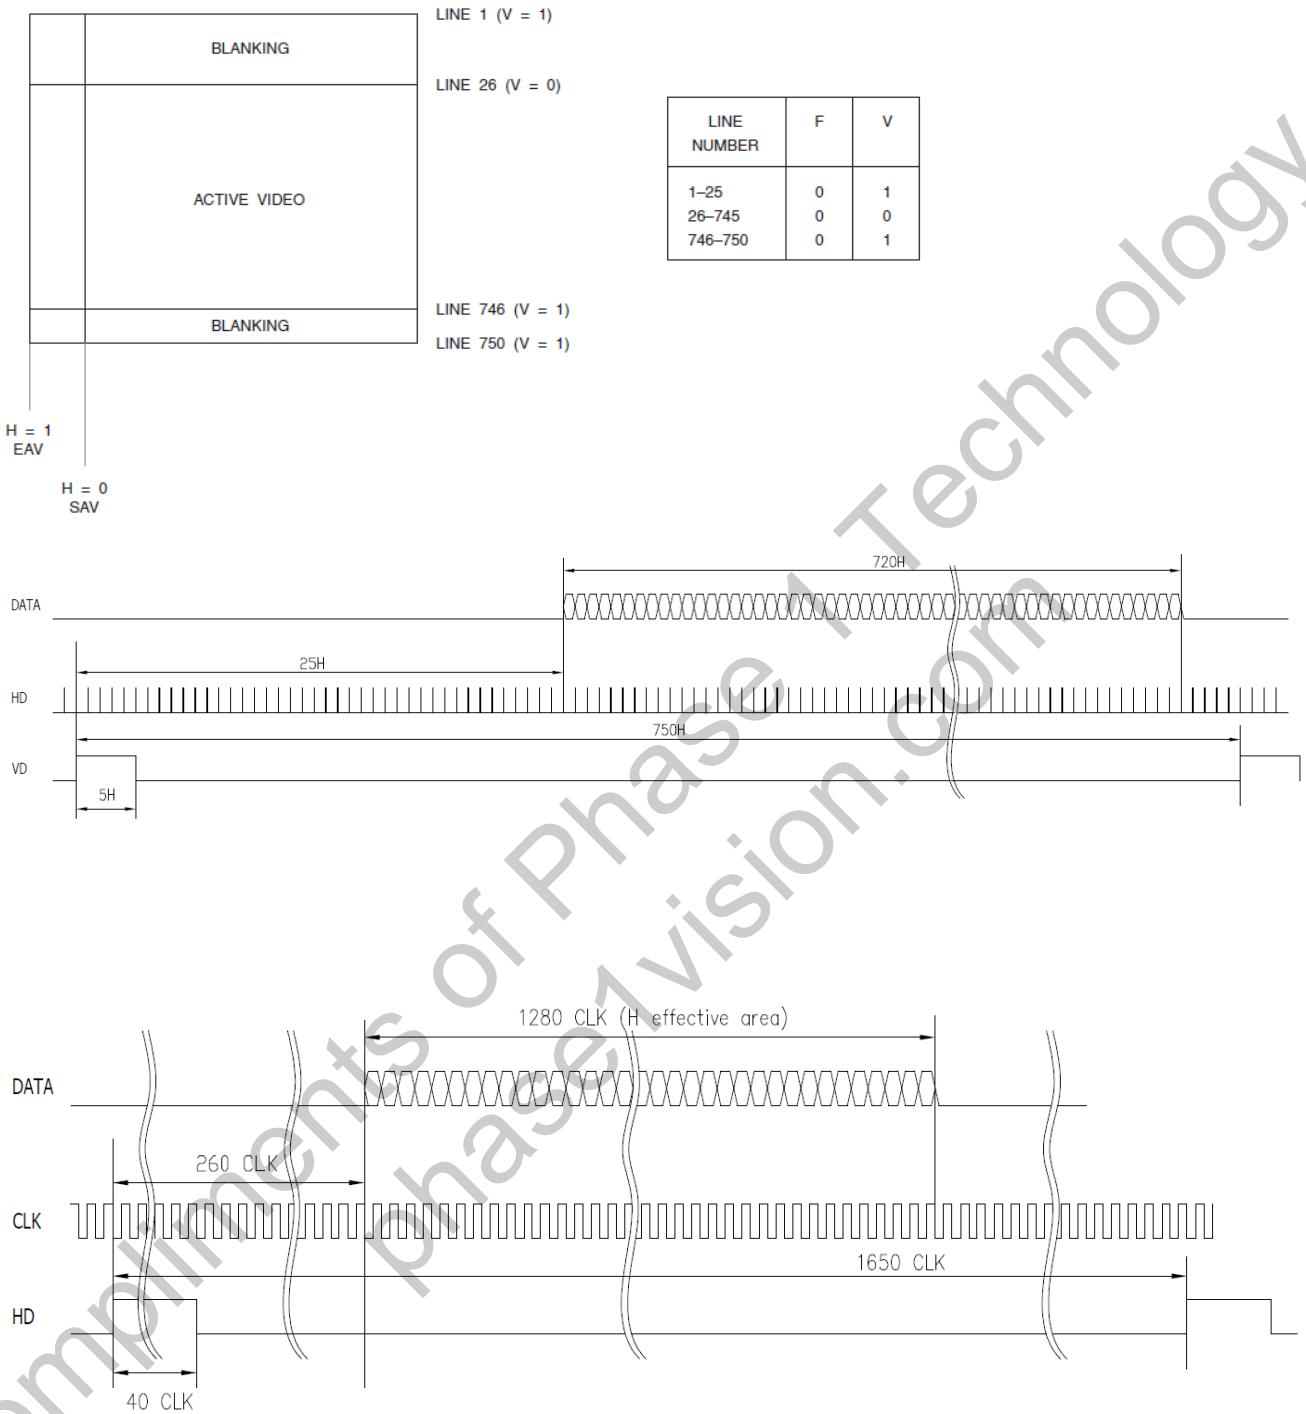




6.7. Output Timing Chart(1280x720p@50)

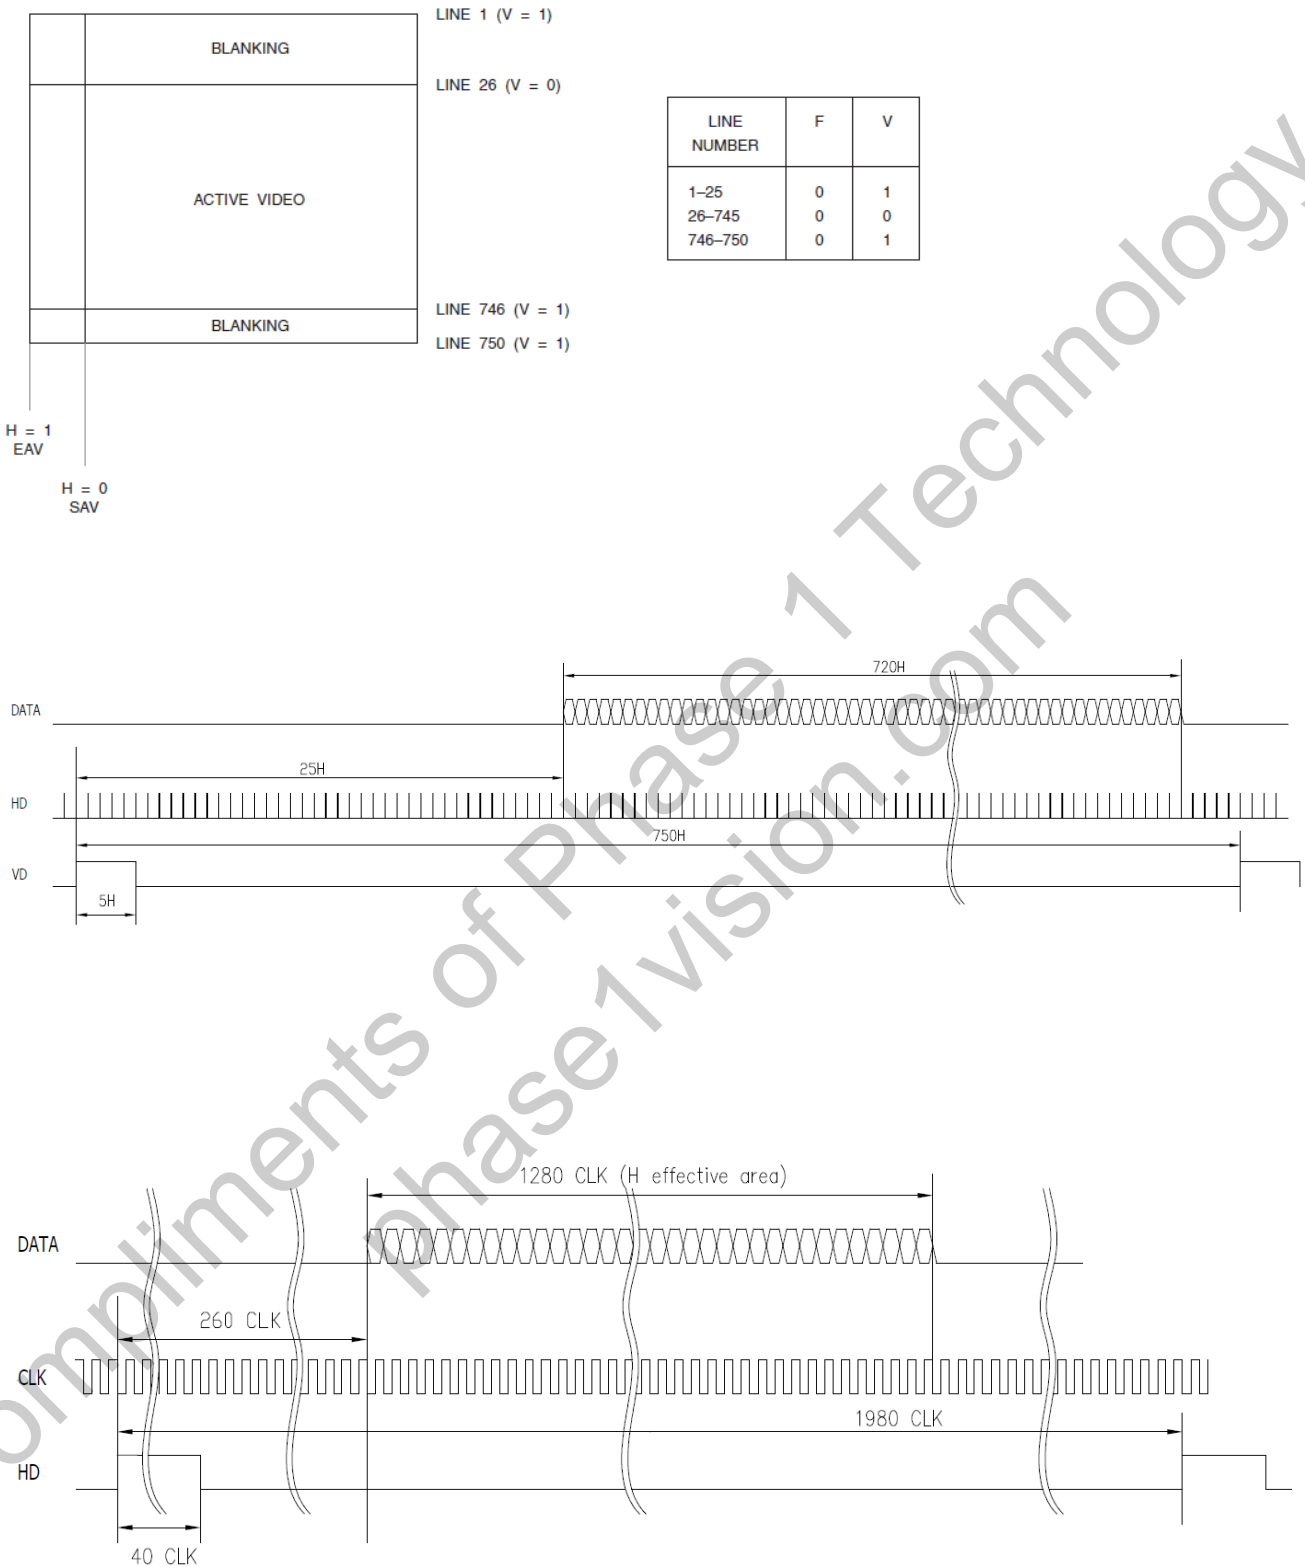




6.8. Output Timing Chart(1280x720p@30/29.97)

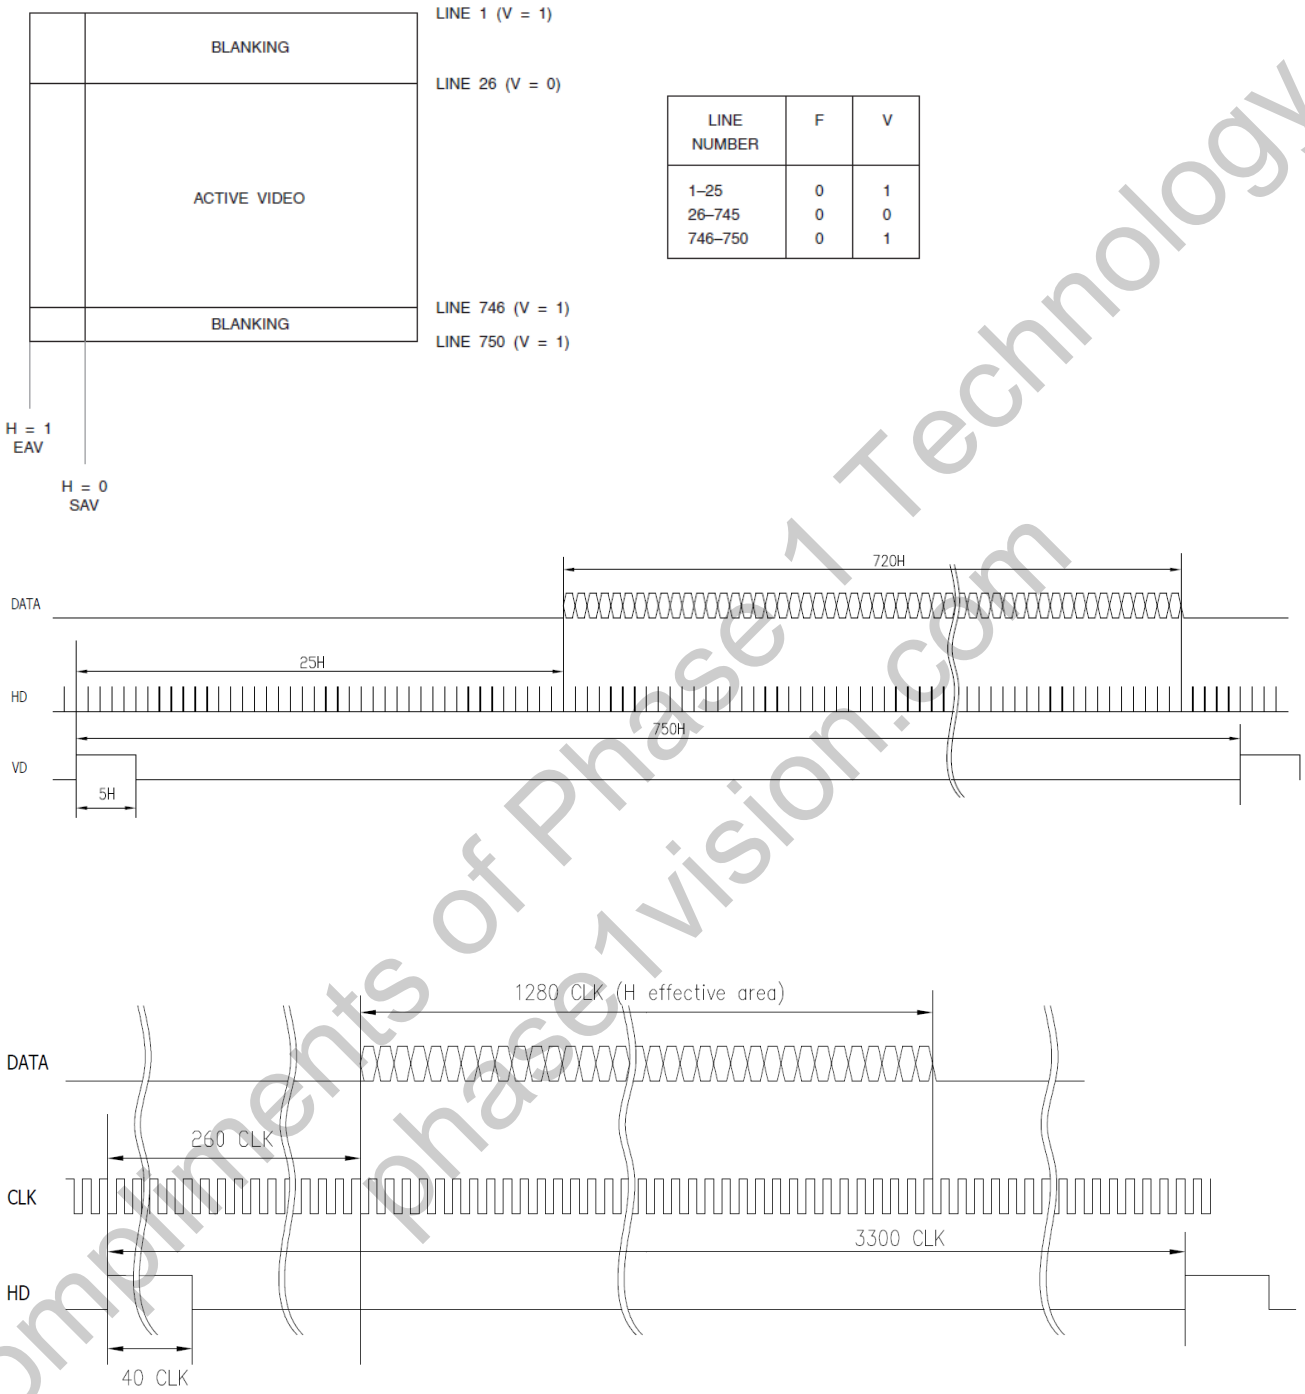




6.9. Output Timing Chart(1280x720p@25)

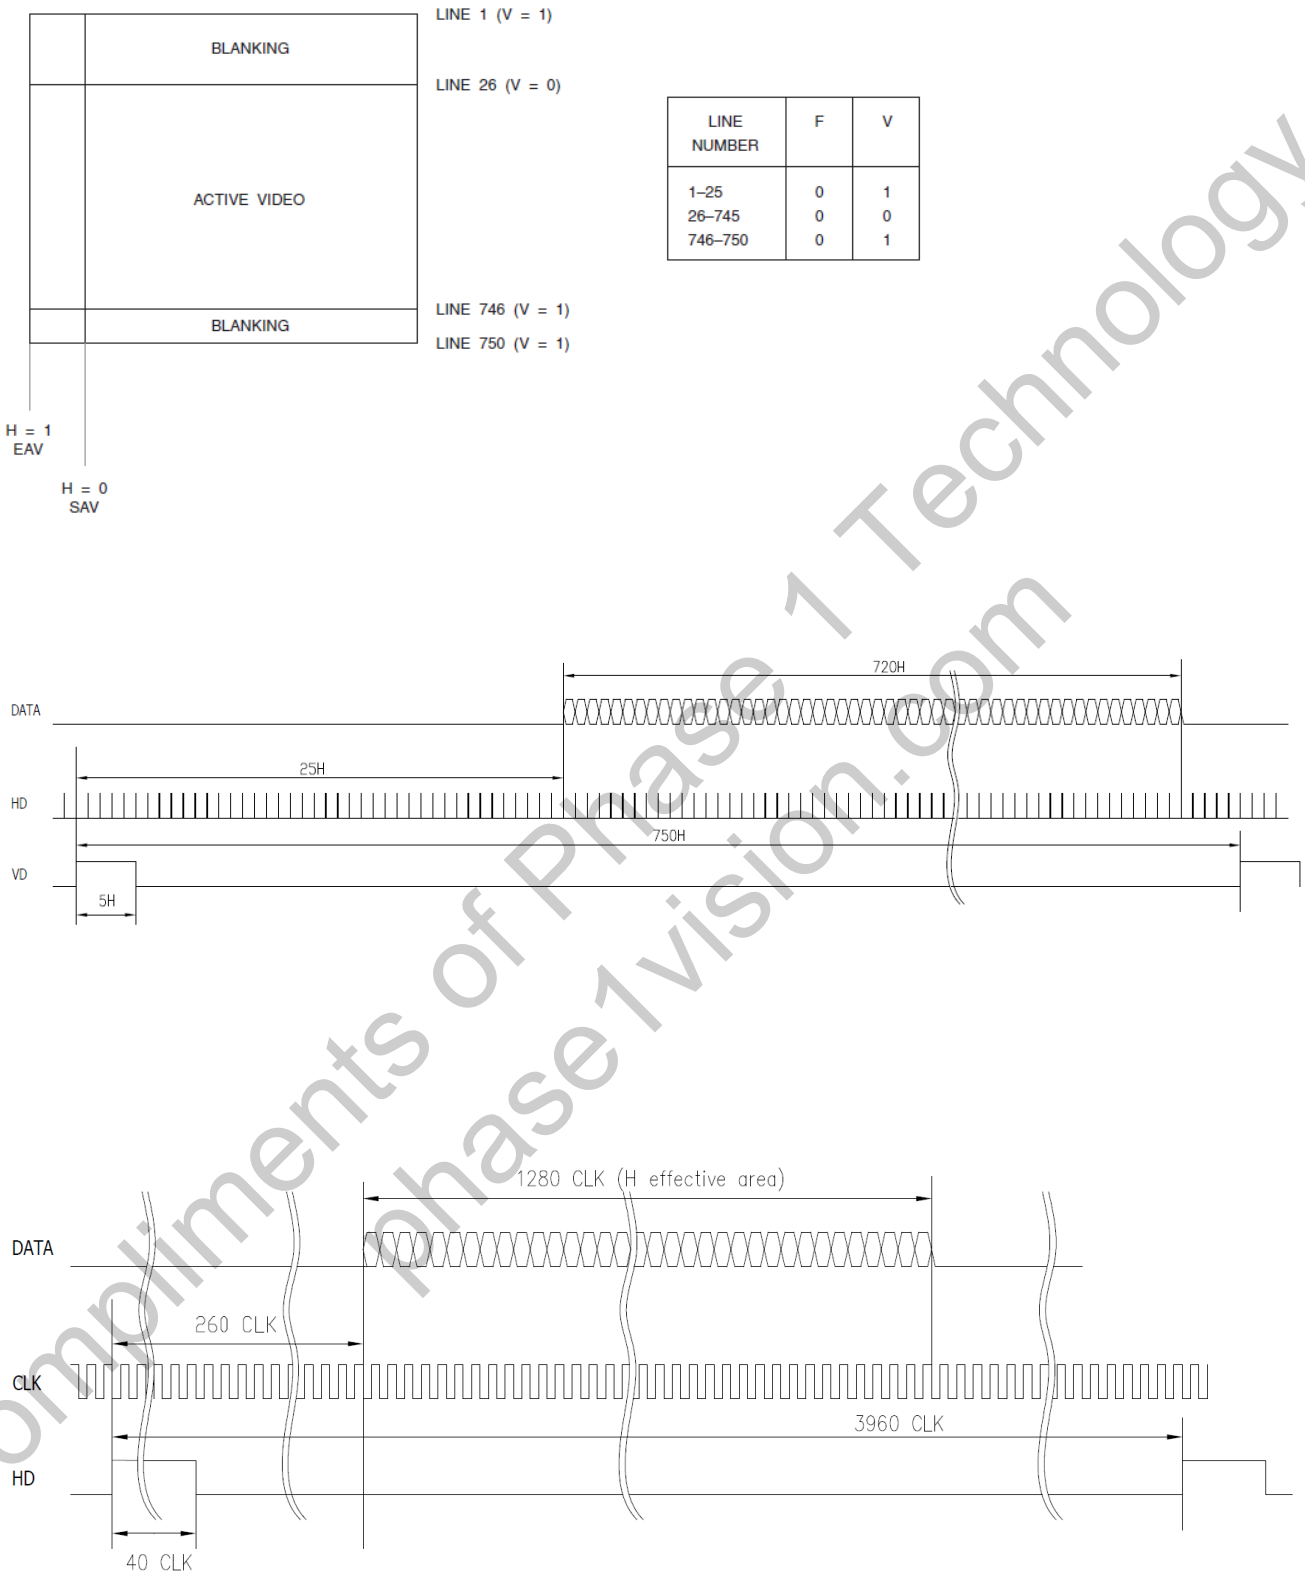



6.10. Video Data Start/Stop Format

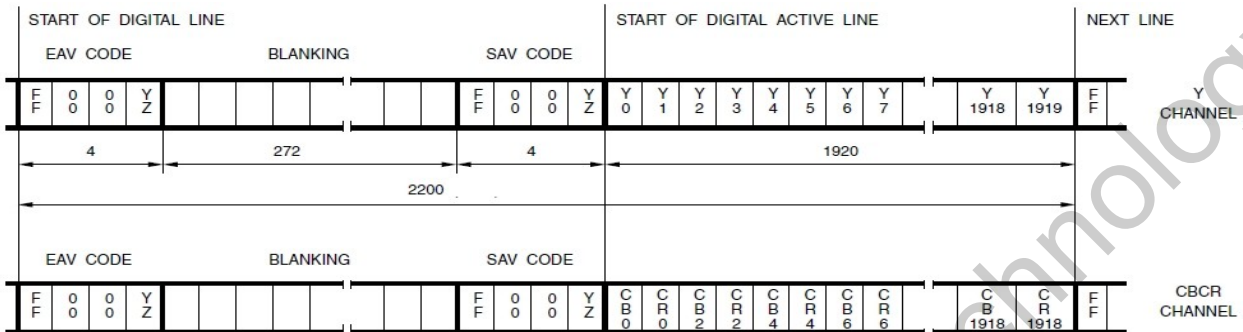

EAV and SAV CODE

| | D7 ^(MSB) | D6 | D5 | D4 | D3 | D2 | D1 | D0 ^(LSB) |
|-------------|---------------------|----|----|----|----|----|----|---------------------|
| Preamble | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Status word | 1 | F | V | H | P3 | P2 | P1 | P0 |

EAV and SAV Sequence

The EAV and SAV sequences are shown in Table A. The status word is defined as:

F = "0" or "1" (Selectable)

V = "1" during vertical blanking

H = "0" at SAV H = "1" at EAV

P3-P0 = protection bits

$$P3 = V \oplus H$$

$$P2 = F \oplus H$$


$$P1 = F \oplus V$$

$$P0 = F \oplus V \oplus H$$



7. Camera Interface

7.1. Camera Interface

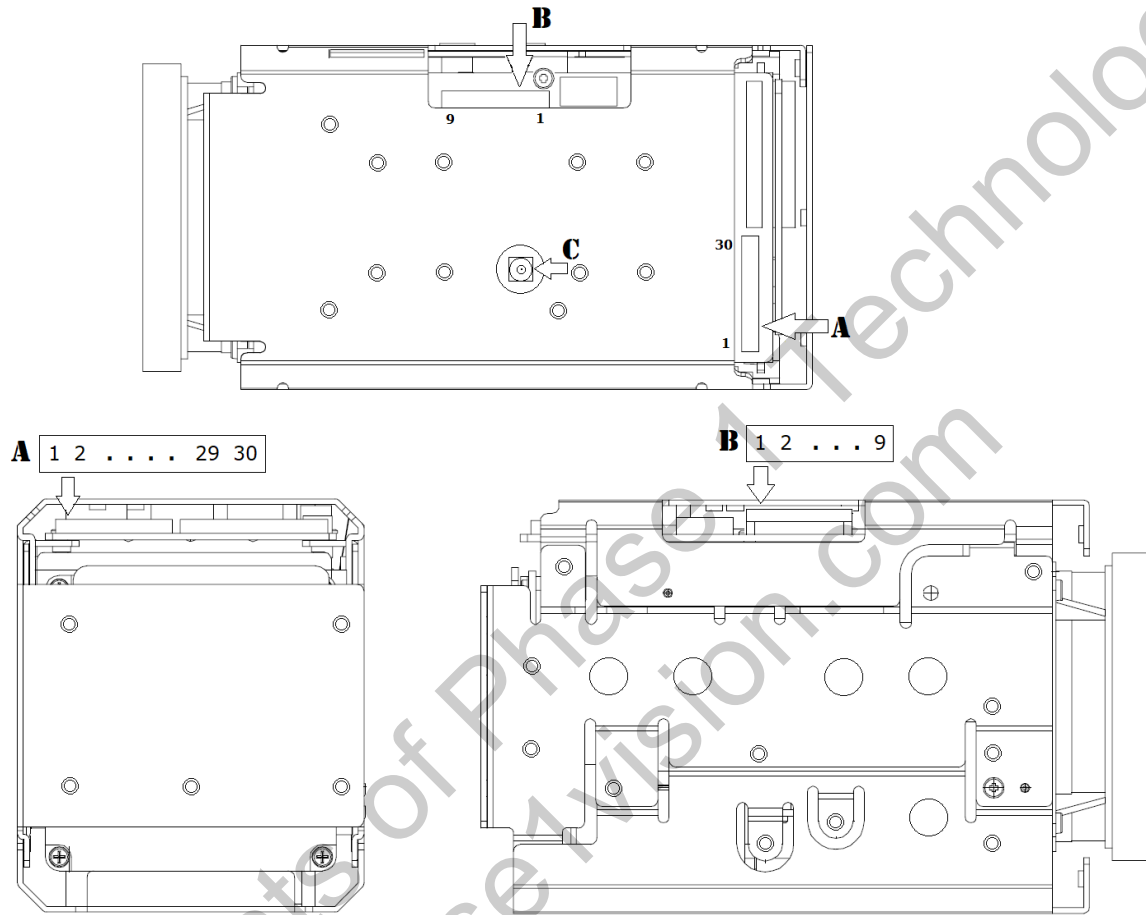

Compliments of Phase 4 Technology
phase4vision.com



B connector:

Connector – Molex 52271-0979 (1.0mm pitch, Bottom Contact)


| Pin | Name | Level |
|-----|-------------------|--------------------------|
| 1 | RXD (UART input) | CMOS 5V (High Min. 2.5V) |
| 2 | TXD (UART output) | CMOS 5V (High Min. 4.5V) |
| 3 | GND | |
| 4 | DC power input | 9 ~ 15VDC |
| 5 | GND | |
| 6 | CVBS Output | |
| 7 | GND | |
| 8 | N.C | |
| 9 | N.C | |

C connector: SDI

Connector –MMCX (micro-miniature coaxial) Female Jack (product called 21Z30S - MMCX) or u-fl (ultra small coaxial connector) Female jack (product called 21Z30S- ufl)

A connector :Recommended cable ASSY :

- Cables - micro coaxial cable #42AWG
- Connectors - USL20-30S (KEL)

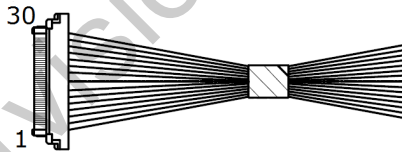


Camera Side

| KEL USL00-30L | | | |
|---------------|------------------|----|---|
| 1 | TXOUT3+ (LVDS) | 16 | DC (9~15V) |
| 2 | TXOUT3- (LVDS) | 17 | DC (9~15V) |
| 3 | TXCLKOUT+ (LVDS) | 18 | DC (9~15V) |
| 4 | TXCLKOUT- (LVDS) | 19 | KEY input |
| 5 | TXOUT2+ (LVDS) | 20 | GND |
| 6 | TXOUT2- (LVDS) | 21 | TXOUT7+ (LVDS) for Dual out mode |
| 7 | TXOUT1+ (LVDS) | 22 | TXOUT7- (LVDS) for Dual out mode |
| 8 | TXOUT1- (LVDS) | 23 | TXOUT6+ (LVDS) for Dual out mode |
| 9 | TXOUT0+ (LVDS) | 24 | TXOUT6- (LVDS) for Dual out mode |
| 10 | TXOUT0- (LVDS) | 25 | CVBS output |
| 11 | GND | 26 | EXT. Reset :Reset Low(GND), Normal Open(3.3V) |




| | | | |
|----|----------------------------------|----|----------------------------------|
| 12 | TXD (UART output) High Min. 4.5V | 27 | TXOUT5+ (LVDS) for Dual out mode |
| 13 | RXD (UART input) High Min. 2.5V | 28 | TXOUT5- (LVDS) for Dual out mode |
| 14 | DC (9~15V) | 29 | TXOUT4+ (LVDS) for Dual out mode |
| 15 | DC (9~15V) | 30 | TXOUT4- (LVDS) for Dual out mode |

7.2. LVDS Interface

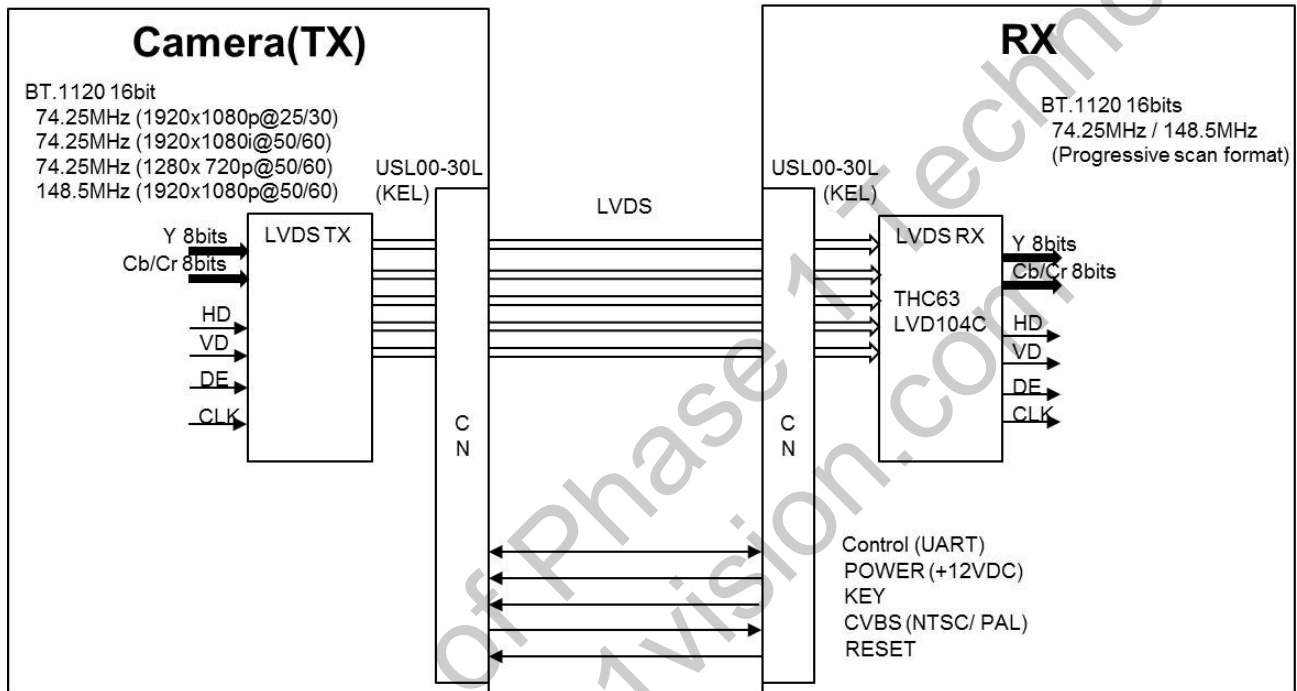


LVDS Single Output only

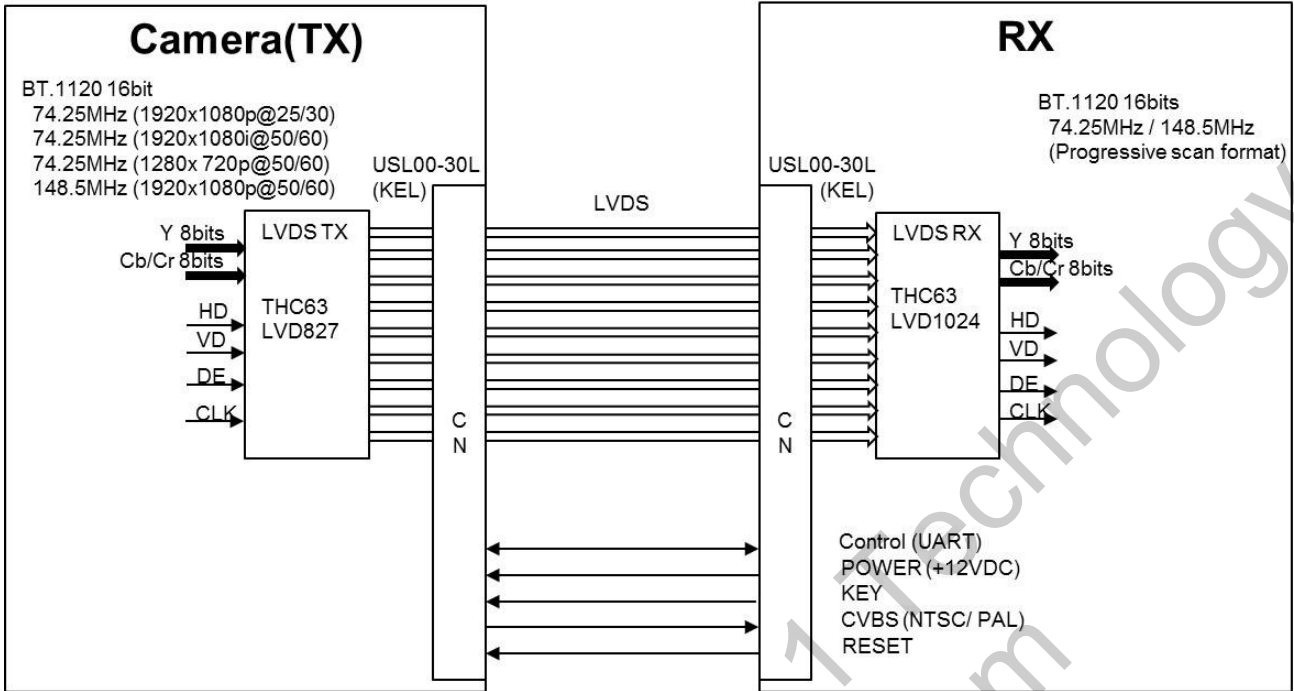

LVDS Single/Dual Output


LVDS Data Mapping

Single Mode (16bits)

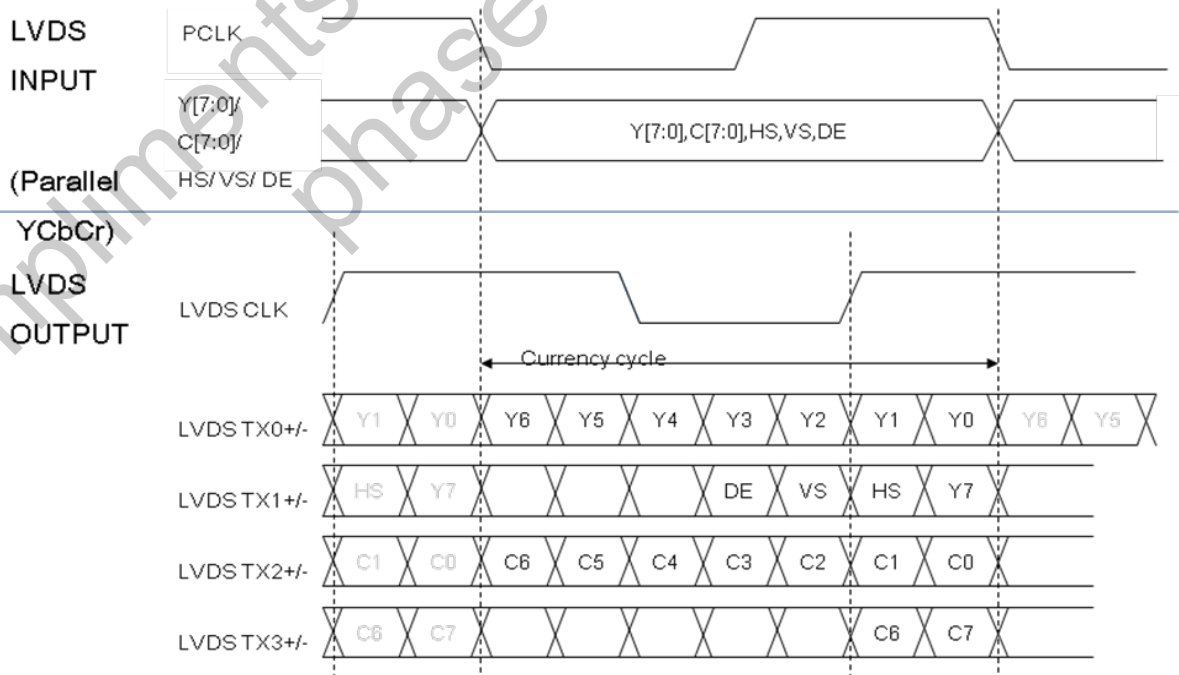



Dual Mode (16bits)

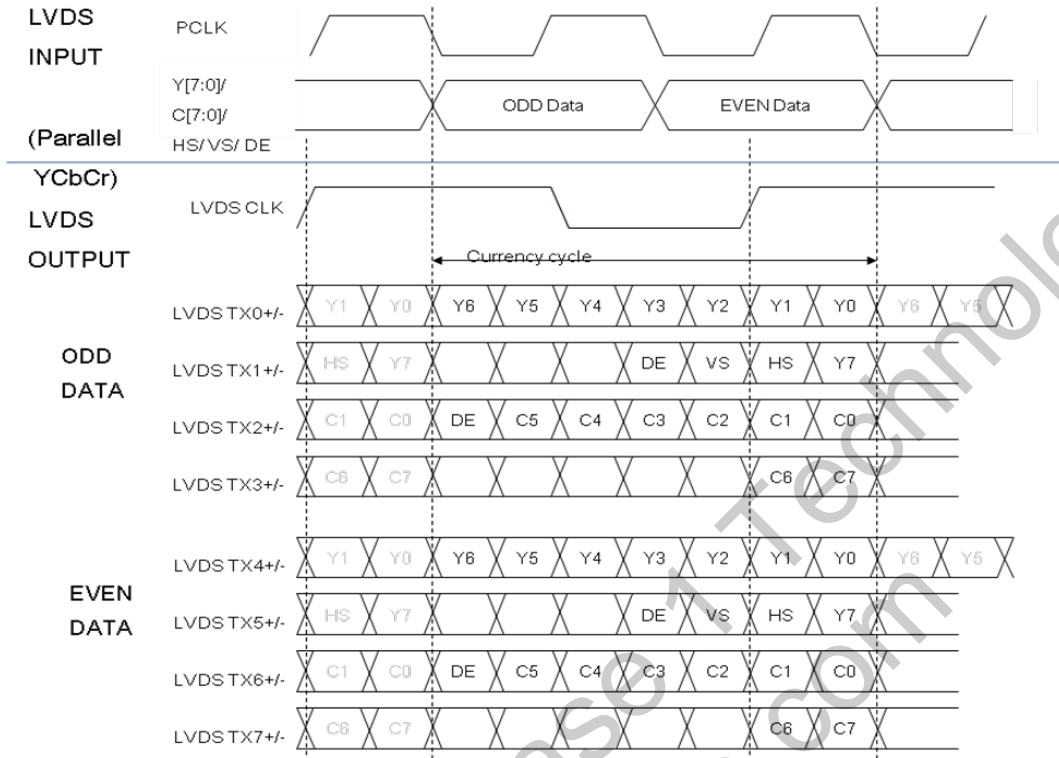


7.3. Application of recommended circuit Camera Reception


LVDS Rx(THC63LVD104C) circuit (Single Output Only)




LVDS Rx(THC63LVD1024) circuit (Single output)

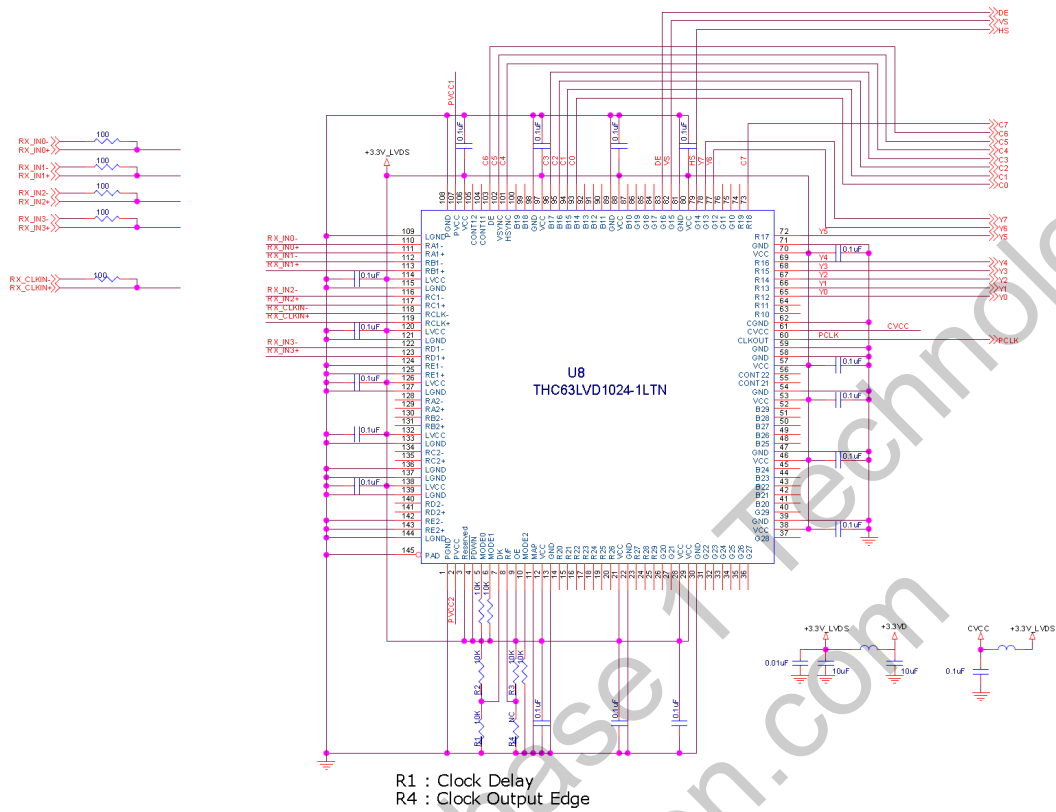

LVDS Rx(THC63LVD1024) circuit (Dual output)

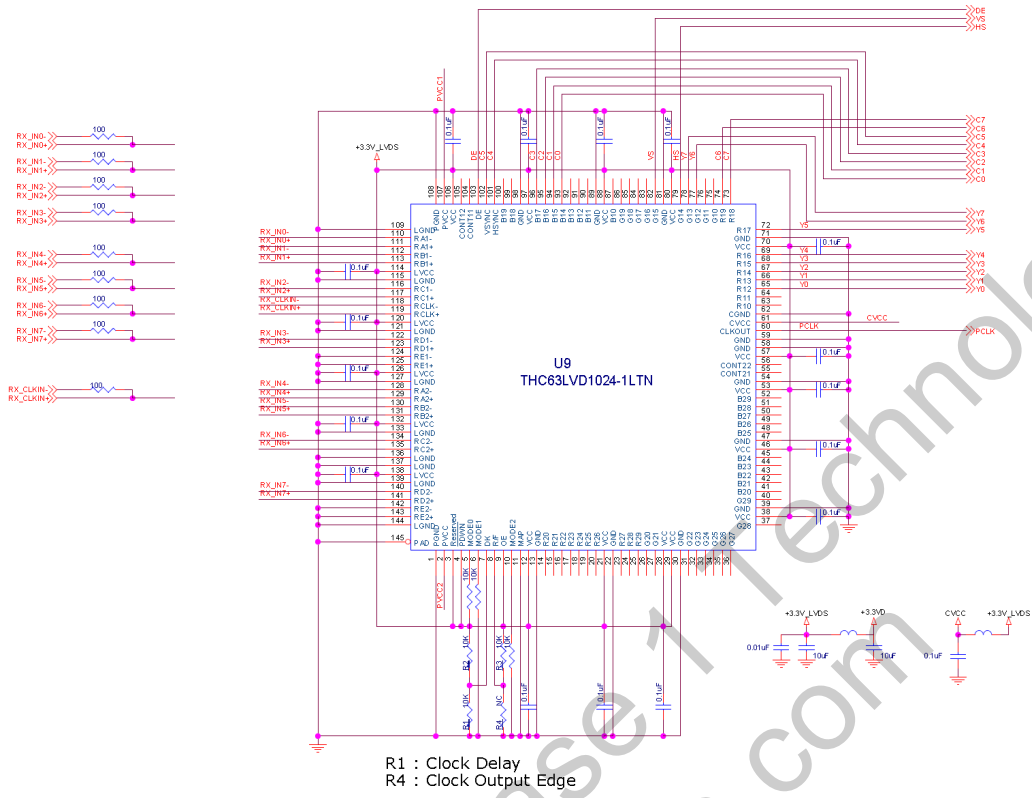


7.4. Key Application recommended circuit

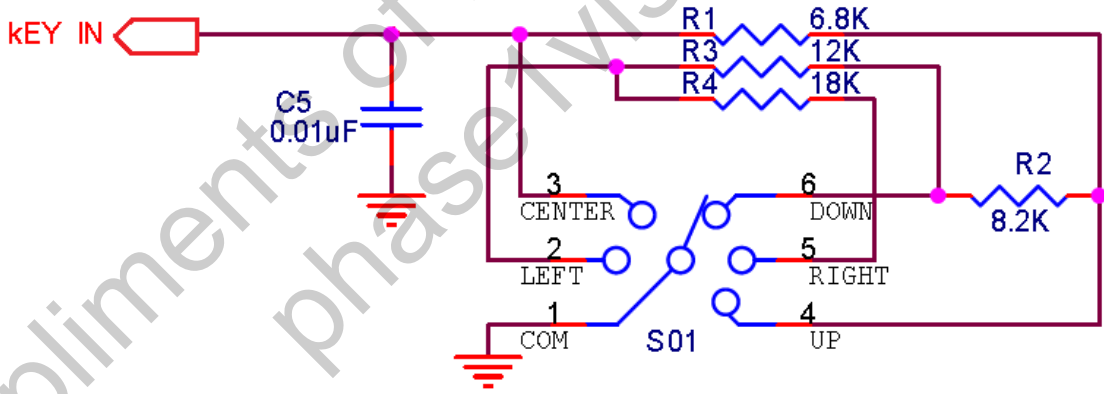




8. Dimensions


Front




Right side

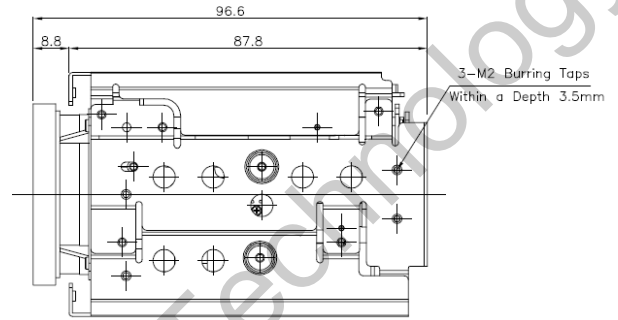


Top

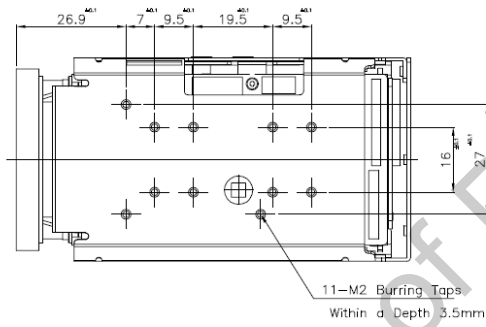


Left side

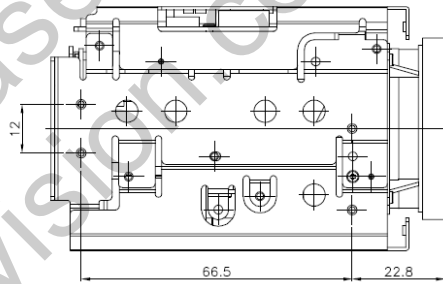

Bottom

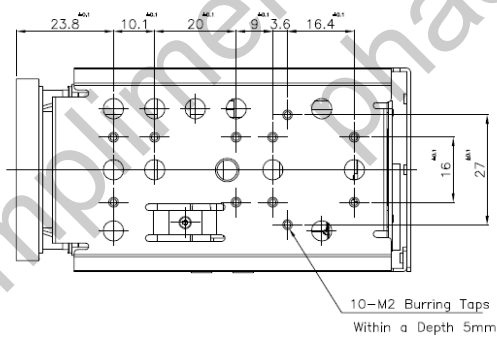

Back





APPENDIX A

VISCA Protocol


9600, 19200, 38400, 115200bps 8bit data 1stop bit none parity

| Command Packet (3~ 16bytes) | | | Comments |
|---|------------------------|-----------------|--|
| Inquiry | | 8X QQ RR ... FF | 8X: 0x80+Sender addr(H nibble)+Recv addr(L nibble) addr(1~7) QQ: 01-Command/ 00-Inquiry RR: Category 00(Interface) 04(cam1) 06(Pan/Tilt) 07(cam2) FF: Terminator (0xff) |
| Reply Packet | | | |
| Completion message | ACK | X0 4Y FF | X = 9 to F: Camera address + 8 |
| | Completion (commands) | X0 5Y FF | Y: socket number |
| | Completion (Inquiries) | X0 5Y ... FF | |
| Reply Packet | | | |
| Error message | Error | X0 6Y 01 FF | Message length error (>14 bytes) |
| | | X0 6Y 02 FF | Syntax Error |
| | | X0 6Y 03 FF | Command buffer full |
| | | X0 6Y 04 FF | Command cancelled |
| | | X0 6Y 05 FF | No socket (to be cancelled) |
| | | X0 6Y 41 FF | Command not executable |
| X = 9 to F: Camera address + 8, Y = socket number | | | |
| Command execution cancel | cancel | 8X 2Y FF | X = 1 to 7: Camera address, Y = socket number |
| Network Change Address | Network Change | 88 30 01 FF . | Always broadcasted |
| | | X0 38 FF | X = 9 to F: Camera address + 8 |



| | Command Packet | Reply Packet |
|-----------------------|----------------|----------------|
| IF_Clear | 8X 01 00 01FF | X0 50 FF |
| IF_Clear (broad-cast) | 88 01 00 01 FF | 88 01 00 01 FF |

| | Inquiry Packet | Reply Packet | |
|----------------|----------------|-------------------------------|---|
| CAM_VersionInq | 8X 09 00 02 FF | Y0 50 GG GG HH HH JJ JJ KK FF | GGGG = Vender ID 002B: HHHH = Model ID 1020: IVZ-FU10 x10 FullHD module 2021: IVZ-FU20 x20 FullHD module 3020: IVZ-FZ30 x30 FullHD module 3520: IVZ-FZ36 x36 FullHD module JJJJ = ROM revision KK = Maximum socket #(02) |



Implemented Command

not Implemented Command

Compliments of Phase 1 Technology
phase1vision.com



Command Set

| Command Set | Command | Packet | Comments |
|---------------|----------------------|----------------------------|---|
| AddressSet | Broadcast | 88 30 01 FF | Address setting |
| IF_Clear | Broadcast | 88 01 00 01 FF | I/F Clear |
| CommandCancel | | 8x 2p FF | p: Socket No. (=1 or 2) |
| CAM_Power | On | 8x 01 04 00 02 FF | Power ON/OFF (specific model *m1) |
| | Off(Standby) | 8x 01 04 00 03 FF | |
| CAM_Zoom | Stop | 8x 01 04 07 00 FF | |
| | Tele (Standard) | 8x 01 04 07 02 FF | |
| | Wide (Standard) | 8x 01 04 07 03 FF | |
| | Tele (Variable) | 8x 01 04 07 2p FF | p=0 (Low) to 7 (High) |
| | Wide (Variable) | 8x 01 04 07 3p FF | |
| | Direct (AF Zoom) | 8x 01 04 47 0p 0q 0r 0s FF | pqr: Zoom Position (refer Table) Auto Focusing during Zooming |
| | Direct (Non AF Zoom) | 8x 01 04 45 0p 0q 0r 0s FF | pqr: Zoom Position (refer Table) Non AF during Zooming |
| CAM_DZoom | On | 8x 01 04 06 02 FF | Digital zoom ON/OFF |
| | Off | 8x 01 04 06 03 FF | |
| CAM_DZoom | Combine Mode | 8x 01 04 36 00 FF | Optical/Digital Zoom Combined |
| | Separate Mode | 8x 01 04 36 01 FF | Optical/Digital Zoom Separate |
| | Stop | 8x 01 04 06 00 FF | |
| | Tele (Variable) | 8x 01 04 06 2p FF | p=0 (Low) to 7 (High) |
| | Wide (Variable) | 8x 01 04 06 3p FF | * Enabled during Separate Mode |
| | x1/Max | 8x 01 04 06 10 FF | x1/MAX Magnification Switchover * Enabled during Separate Mode |
| | Direct | 8x 01 04 46 0p 0q 0r 0s FF | pq: D-Zoom Position * Enabled during Separate Mode |



Command Set

| Command Set | Command | Packet | Comments |
|---------------------------|----------------------|-------------------------------|---|
| CAM_Focus | Stop | 8x 01 04 08 00 FF | |
| | Far (Standard) | 8x 01 04 08 02 FF | |
| | Near (Standard) | 8x 01 04 08 03 FF | |
| | Far (Variable) | 8x 01 04 08 2p FF | p=0 (Low) to 7 (High) |
| | Near (Variable) | 8x 01 04 08 3p FF | |
| | Direct | 8x 01 04 48 0p 0q 0r 0s FF | pqrs: Focus Position (0x1000 - 0xC000) |
| | Auto Focus | 8x 01 04 38 02 FF | AF ON/OFF |
| | Manual Focus | 8x 01 04 38 03 FF | |
| | Auto/Manual | 8x 01 04 38 10 FF | |
| | One Push Trigger | 8x 01 04 18 01 FF | One Push AF Trigger |
| | <i>Infinity</i> | <i>8x 01 04 18 02 FF</i> | <i>Forced infinity</i> |
| | Near Limit | 8x 01 04 28 0p 0q 0r 0s FF | pqrs: Focus Near Limit Position |
| AF Sensitivity | Normal | 8x 01 04 58 02 FF | AF Sensitivity High/Low |
| | Low | 8x 01 04 58 03 FF | |
| CAM_AFMode | Normal AF | 8x 01 04 57 00 FF | AF Movement Mode |
| | Interval AF | 8x 01 04 57 01 FF | |
| | Zoom Trigger AF | 8x 01 04 57 02 FF | |
| | Active/Interval Time | 8x 01 04 27 0p 0q 0r 0s FF | pq: Movement Time, rs: Interval |
| CAM_IRCorrection | Standard | 8x 01 04 11 00 FF | FOCUS IR compensation data switching |
| | IR Light | 8x 01 04 11 01 FF | |
| CAM_ZoomFocus | Direct | 8x 01 04 47 0p 0q 0r 0s 0t 0u | pqrs: Zoom Position (refer Table) |
| | | 0v 0w FF | tuvw: Focus Position |
| CAM_ZoomFocus variable | Direct | 8x 01 04 47 0n 0p 0q 0r 0s 0t | n: zoom speed 0(low) to 7(high) |
| | | 0u 0v 0w FF | pqrs: Zoom Position (refer Table) tuvw: Focus Position |
| CAM_Initialize | Lens | 8x 01 04 19 01 FF | Lens Initialization Start |
| | Camera | 8x 01 04 19 03 FF | Camera reset |



Command Set

| Command Set | Command | Packet | Comments |
|--------------------|--------------------------|--------------------------------------|---|
| CAM_WB | Auto | 8x 01 04 35 00 FF | Normal Auto |
| | Indoor | 8x 01 04 35 01 FF | Indoor mode |
| | Outdoor | 8x 01 04 35 02 FF | Outdoor mode |
| | One Push WB | 8x 01 04 35 03 FF | One Push WB mode |
| | ATW | 8x 01 04 35 04 FF | Auto Tracing White Balance |
| | Manual | 8x 01 04 35 05 FF | Manual Control mode |
| | One Push Trigger | 8x 01 04 10 05 FF | One Push WB Trigger |
| | <i>Outdoor Auto</i> | <i>8x 01 04 35 06 FF</i> | <i>Outdoor auto</i> |
| | <i>Sodium Lamp Auto</i> | <i>8x 01 04 35 07 FF</i> | <i>Auto including sodium lamp source</i> |
| <i>Sodium Lamp</i> | <i>8x 01 04 35 08 FF</i> | <i>Sodium lamp source fixed mode</i> | |
| CAM_RGain | Reset | 8x 01 04 03 00 FF | Manual Control of R Gain |
| | Up | 8x 01 04 03 02 FF | |
| | Down | 8x 01 04 03 03 FF | |
| | Direct | 8x 01 04 43 00 00 0p 0q FF | pq: R Gain (0 to 0xFF) |
| CAM_BGain | Reset | 8x 01 04 04 00 FF | Manual Control of B Gain |
| | Up | 8x 01 04 04 02 FF | |
| | Down | 8x 01 04 04 03 FF | |
| | Direct | 8x 01 04 44 00 00 0p 0q FF | pq: B Gain (0 to 0xFF) |
| CAM_AE | Full Auto | 8x 01 04 39 00 FF | Automatic Exposure mode |
| | Manual | 8x 01 04 39 03 FF | Manual Control mode |
| | Shutter Priority | 8x 01 04 39 0A FF | Shutter Priority Automatic Exposure mode |
| | Iris Priority | 8x 01 04 39 0B FF | Iris Priority Automatic Exposure mode |
| | Bright | 8x 01 04 39 0D FF | Bright Mode (Manual control) |
| CAM_SlowShutter | Auto | 8x 01 04 5A 02 FF | Auto Slow Shutter ON/OFF |
| | Manual | 8x 01 04 5A 03 FF | |
| CAM_Shutter | Reset | 8x 01 04 0A 00 FF | Shutter Setting |
| | Up | 8x 01 04 0A 02 FF | |
| | Down | 8x 01 04 0A 03 FF | |
| | Direct | 8x 01 04 4A 00 00 0p 0q FF | pq: Shutter Position (refer Table) |
| CAM_Iris | Reset | 8x 01 04 0B 00 FF | Iris Setting |
| | Up | 8x 01 04 0B 02 FF | |
| | Down | 8x 01 04 0B 03 FF | |
| | Direct | 8x 01 04 4B 00 00 0p 0q FF | pq: Iris Position (0 to 0x11) (refer Table) |



Command Set

| Command Set | Command | Packet | Comments |
|----------------|---------------|---|---|
| CAM_Gain | Reset | 8x 01 04 0C 00 FF | Gain Setting |
| | Up | 8x 01 04 0C 02 FF | |
| | Down | 8x 01 04 0C 03 FF | |
| | Direct | 8x 01 04 4C 00 00 0p 0q FF | pq: Gain Position (0 to 0x0F) (refer Table) |
| | Gain Limit | 8x 01 04 2C 0p FF | p: Gain Position (refer Table) |
| CAM_Bright | Reset | 8x 01 04 0D 00 FF | Bright Setting |
| | Up | 8x 01 04 0D 02 FF | |
| | Down | 8x 01 04 0D 03 FF | |
| | Direct | 8x 01 04 4D 00 00 0p 0q FF | pq: Bright Position (0 to 0x1f) (refer Table) |
| CAM_ExpComp | On | 8x 01 04 3E 02 FF | Exposure Compensation ON/OFF |
| | Off | 8x 01 04 3E 03 FF | |
| | Reset | 8x 01 04 0E 00 FF | Exposure Compensation Amount Setting |
| | Up | 8x 01 04 0E 02 FF | |
| | Down | 8x 01 04 0E 03 FF | |
| | Direct | 8x 01 04 4E 00 00 0p 0q FF | pq: ExpComp Position (0 to 0x0E) |
| CAM_BackLight | On | 8x 01 04 33 02 FF | Back Light Compensation ON/OFF |
| | Off | 8x 01 04 33 03 FF | |
| CAM_SpotAE | On | 8x 01 04 59 02 FF | Spot Automatic Exposure Setting |
| | Off | 8x 01 04 59 03 FF | |
| | Position | 8x 01 04 29 0p 0q 0r 0s FF | pq: X (0 to F), rs: Y (0 to F) |
| CAM_AEResponse | <i>Direct</i> | <i>8x 01 04 5D pp FF</i> | <i>pp: Automatic Exposure Response Setting (01 to 30)</i> |
| CAM_WD | On | 8x 01 04 3D 02 FF | Wide-D ON/OFF |
| | Off | 8x 01 04 3D 03 FF | |
| | VE On | 8x 01 04 3d 06 FF | VE On |
| | Set Parameter | 8x 01 04 2D 00 0q 0r 0s 00 00 00 00 FF | q: Display brightness level(0:Dark to 6:Bright) r: Brightness compensation selection (0: Very dark 1: Dark 2: Standard 3: Bright) s: Compensation level (0: L 1: M 2: H) |
| | | | |
| CAM_Aperture | Reset | 8x 01 04 02 00 FF | Aperture Control |
| | Up | 8x 01 04 02 02 FF | |
| | Down | 8x 01 04 02 03 FF | |
| | Direct | 8x 01 04 42 00 00 0p 0q FF | pq: Aperture Gain (0 to 0x14) (refer Table) |



Command Set

| Command Set | Command | Packet | Comments | |
|---------------------------|-----------|-------------------------------------|--|---|
| CAM_HR | On | 8x 01 04 52 02 FF | High-Resolution Mode ON/OFF | |
| | Off | 8x 01 04 52 03 FF | | |
| CAM_NR | | 8x 01 04 53 0p FF | p: NR Setting (0:OFF 1:Low 2:Mid 3:High 4:Auto) | |
| CAM_Gamma | | 8x 01 04 5B 0p FF | p: Gamma setting (0~9) 0: Standard 1: Straight | |
| | Offset | 8x 01 04 1E 00 00 00 0s 0t 0u FF | s: Polarity offset (0 is plus, 1 is minus) tu: Offset s=0 (00h to 40h) Offset s=1 (00h to 40h) | |
| CAM_HighSensitivity | On | 8x 01 04 5E 02 FF | High Sensitivity mode ON/OFF | |
| | Off | 8x 01 04 5E 03 FF | | |
| CAM_LR_Reverse | On | 8x 01 04 61 02 FF | Mirror Image ON/OFF | |
| | Off | 8x 01 04 61 03 FF | | |
| CAM_Freeze | On | 8x 01 04 62 02 FF | Still Image ON/OFF | |
| | Off | 8x 01 04 62 03 FF | | |
| CAM_PictureEffect | Off | 8x 01 04 63 00 FF | Picture Effect Setting | |
| | Neg.Art | 8x 01 04 63 02 FF | | |
| | B&W | 8x 01 04 63 04 FF | | |
| CAM_Defog | On | 8x 01 04 37 02 0p FF | p:Defog level (0:auto, 1:low, 2:mid, 3:high) | |
| | Off | 8x 01 04 37 03 00 FF | | |
| CAM_PictureFlip | On | 8x 01 04 66 02 FF | Picture flip ON/OFF | |
| | Off | 8x 01 04 66 03 FF | | |
| CAM_MinShutter | On | 8x 01 04 12 02 FF | | |
| | Off | 8x 01 04 12 03 FF | | |
| | Limit | 8x 01 04 13 00 00 0p 0q FF | | pq: Minimum Shutter Position (05h to 15h) |
| CAM_ICR | On | 8x 01 04 01 02 FF | Infrared Mode ON/OFF | |
| | Off | 8x 01 04 01 03 FF | | |
| CAM_AutoICR | On | 8x 01 04 51 02 FF | Auto dark-field mode On/Off | |
| | Off | 8x 01 04 51 03 FF | | |
| | Threshold | 8x 01 04 21 00 00 0p 0q FF | | pq: ICR On/Off Threshold Level(0 to 0x14) |
| CAM_AutoICR AlarmReply | On | 8x 01 04 31 02 FF | Auto ICR switching Alarm ON/OFF | |
| | Off | 8x 01 04 31 03 FF | | |
| | (Reply) | y0 07 04 31 02 FF | | ICR OFF -> ON |
| | (Reply) | y0 07 04 31 03 FF | | ICR ON -> OFF |



Command Set

| Command Set | Command | Packet | Comments | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------------|-------------------|--|--|---|---|---|---|-------|-------|-------|------|-------|-------|-----|------|---|---|---|---|---|---|---|---|-------|-------|-----|------|---|---|---|---|---|---|---|---|-------|-------|-----|------|---|---|---|--|---|---|---|---|-------|-------|-----|------|---|---|---|---|---|---|---|---|-------|-------|-----|------|--|--|--|--|--|--|--|--|-------|-------|-----|------|--|--|--|--|--|--|--|--|-------|-------|-----|------|--|--|--|--|--|--|--|--|-------|-------|-----|------|--|--|--|--|--|--|--|--|-------|-------|-----|------|--|---|---|---|---|---|---|---|-------|-------|-----|------|--|--|--|--|--|--|--|--|-------|-------|-----|------|
| CAM_Stabilizer | On | 8x 01 04 34 02 FF | Stabilizer ON/OFF/HOLD | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Off | 8x 01 04 34 03 FF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Hold | 8x 01 04 34 00 FF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CAM_Memory (Preset pos) | Reset | 8x 01 04 3F 00 0p FF | p: Memory Number (=0 to 6) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Set | 8x 01 04 3F 01 0p FF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Recall | 8x 01 04 3F 02 0p FF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CAM_CUSTOM | Reset | 8x 01 04 3F 00 7F FF | Starts up in this mode when the power is turned on. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Set | 8x 01 04 3F 01 7F FF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Recall | 8x 01 04 3F 02 7F FF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CAM_MemSave | Write | 8x 01 04 23 0X 0p 0q 0r 0s FF | X: 00 to 07 (Address), total 16 byte pqrs: 0x0000 to 0xFFFF (Data) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CAM_Display | On | 8x 01 04 15 02 FF | Display ON/OFF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Off | 8x 01 04 15 03 FF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | On/Off | 8x 01 04 15 10 FF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CAM_MultiLineTitle | Title Set1 | 8x 01 04 73 1L 00 nn pp qq 00 00 00 00 00 00 FF | L: Line Number 0~0xA nn: H-position 0~0x1F pp: Color 0:WHT 1:YEL 2:MAG 3:RED qq: Blink 0:Not blink 1:Blinks | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Title Set2 | 8x 01 04 73 2L mm nn pp qq rr ss tt uu vv ww FF | L: Line Number, mnpqrstuvw: Setting of characters (1 to 10) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Title Set3 | 8x 01 04 73 3L mm nn pp qq rr ss tt uu vv ww FF | L: Line Number, mnpqrstuvw: Setting of characters (11 to 20) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | <table border="1"> <tr><td>A</td><td>B</td><td>C</td><td>D</td><td>E</td><td>F</td><td>G</td><td>H</td><td>0x00,</td><td>0x01,</td><td>...</td><td>0x07</td></tr> <tr><td>I</td><td>J</td><td>K</td><td>L</td><td>M</td><td>N</td><td>O</td><td>P</td><td>0x08,</td><td>0x09,</td><td>...</td><td>0x0f</td></tr> <tr><td>Q</td><td>R</td><td>S</td><td>T</td><td>U</td><td>V</td><td>W</td><td>X</td><td>0x10,</td><td>0x11,</td><td>...</td><td>0x17</td></tr> <tr><td>Y</td><td>Z</td><td>&</td><td></td><td>?</td><td>!</td><td>1</td><td>2</td><td>0x18,</td><td>0x19,</td><td>...</td><td>0x1f</td></tr> <tr><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td><td>9</td><td>0</td><td>0x20,</td><td>0x21,</td><td>...</td><td>0x27</td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0x28,</td><td>0x29,</td><td>...</td><td>0x2f</td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0x30,</td><td>0x31,</td><td>...</td><td>0x37</td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0x38,</td><td>0x39,</td><td>...</td><td>0x3f</td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0x40,</td><td>0x41,</td><td>...</td><td>0x47</td></tr> <tr><td></td><td>"</td><td>:</td><td>'</td><td>.</td><td>,</td><td>/</td><td>-</td><td>0x48,</td><td>0x49,</td><td>...</td><td>0x4f</td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0x50,</td><td>0x51,</td><td>...</td><td>0x57</td></tr> </table> | A | B | C | D | E | F | G | H | 0x00, | 0x01, | ... | 0x07 | I | J | K | L | M | N | O | P | 0x08, | 0x09, | ... | 0x0f | Q | R | S | T | U | V | W | X | 0x10, | 0x11, | ... | 0x17 | Y | Z | & | | ? | ! | 1 | 2 | 0x18, | 0x19, | ... | 0x1f | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 0x20, | 0x21, | ... | 0x27 | | | | | | | | | 0x28, | 0x29, | ... | 0x2f | | | | | | | | | 0x30, | 0x31, | ... | 0x37 | | | | | | | | | 0x38, | 0x39, | ... | 0x3f | | | | | | | | | 0x40, | 0x41, | ... | 0x47 | | " | : | ' | . | , | / | - | 0x48, | 0x49, | ... | 0x4f | | | | | | | | | 0x50, | 0x51, | ... | 0x57 |
| | A | B | C | D | E | F | G | H | 0x00, | 0x01, | ... | 0x07 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | I | J | K | L | M | N | O | P | 0x08, | 0x09, | ... | 0x0f | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Q | R | S | T | U | V | W | X | 0x10, | 0x11, | ... | 0x17 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Y | Z | & | | ? | ! | 1 | 2 | 0x18, | 0x19, | ... | 0x1f | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 0x20, | 0x21, | ... | 0x27 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | 0x28, | 0x29, | ... | 0x2f | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | 0x30, | 0x31, | ... | 0x37 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | 0x38, | 0x39, | ... | 0x3f | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | 0x40, | 0x41, | ... | 0x47 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | " | : | ' | . | , | / | - | 0x48, | 0x49, | ... | 0x4f | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | 0x50, | 0x51, | ... | 0x57 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Title Clear | 8x 01 04 74 1p FF | Title Setting clear (p: 0 to a, f= all lines) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| On | 8x 01 04 74 2p FF | Title display On/Off (0 to a, f= all lines) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Off | 8x 01 04 74 3p FF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



Command Set

| Command Set | Command | Packet | Comments |
|-------------------|-----------------|--|--|
| CAM_Mute | On | 8x 01 04 75 02 FF | Muting ON/OFF |
| | Off | 8x 01 04 75 03 FF | |
| | On/Off | 8x 01 04 75 10 FF | |
| | SetMask | 8x 01 04 76 mm nn 0r 0r 0s 0s FF | mm: Mask Settings nn: 00-Modify, 01-New rr: W ss: H |
| | Display | 8x 01 04 77 pp pp pp pp FF | Mask Display ON/OFF pp pp pp pp: Mask Settings (0: OFF, 1: ON) |
| | SetMaskColor | 8x 01 04 78 pp pp pp pp qq rr FF | pp pp pp pp: Mask Color Settings qq: Color Setting when 0 is selected rr: Color Setting when 1 is selected |
| | CAM_PrivacyZone | SetPanTiltAngle | 8x 01 04 79 0p 0p 0p 0q 0q 0q FF |
| SetPTZMask | | 8x 01 04 7B mm 0p 0p 0p 0q 0q 0q 0r 0r 0r 0r FF | Pan/Tilt/Zoom Settings for Mask ppp: Pan 0~0xFFFF qqq: Tilt 0~0xFFFF rrr: Zoom pos 0~0x4000 |
| Non_InterlockMask | | 8x 01 04 6F mm 0p 0p 0q 0q 0r 0r 0s 0s FF | mm: Non_Interlock Mask Settings pp: X, q: Y, rr: W, ss: H |
| GridOn | | 8x 01 04 7C 02 FF | Grid Display ON/OFF |
| GridOff | | 8x 01 04 7C 03 FF | Grid/Center Line Display Off |
| CenterLineOn | | 8x 01 04 7C 04 FF | Center Line Display On |
| CAM_IDWrite | | | 8x 01 04 22 0p 0q 0r 0s FF |
| CAM_Alarm | On | 8x 01 04 6B 02 FF | Alarm ON/OFF |
| | Off | 8x 01 04 6B 03 FF | |



Command Set

| Command Set | Command | Packet | Comments |
|--------------------------------------|----------------|--|--|
| CAM_MD | On | 8x 01 04 1B 02 FF | Motion Detection On/Off |
| | Off | 8x 01 04 1B 03 FF | |
| | Function Set | 8x 01 04 1C 0m 0n 0p 0q 0r 0s FF | m: Display mode 0-Off 1-On n: Detection Frame Set bit0-Frame0 bit1-Frame1 bit2-Frame2 bit3-Frame3 pq: Threshold Level (00 to 0x14) rs: Interval Time set (00 to 0xF) |
| | Window Set | 8x 01 04 1D 0m pp qq rr ss FF | m: Select Detection Frame (0, 1, 2, 3) pp: Start Horizontal Position (00 to 0x3C) qq: Start Vertical Position (00 to 0x28) rr: Stop Horizontal Position (01 to 0x3C) ss: Stop Vertical Position (01 to 0x28) |
| | Alarm (Reply) | y0 07 04 1B 0p FF | p: Detection Frame Number |
| CAM_Continuous ZoomPosReply | On | 8x 01 04 69 02 FF | ZoomPosition data Continuous Output On/Off |
| | Off (Reply) | 8x 01 04 69 03 FF y0 07 04 69 0p 0p 0q 0q 0q 0q FF | pp: D-Zoom Position * 00: When Zoom Mode is Combine qqqq: Zoom Position |
| CAM_ZoomPosRe- plyIntervalTimeSet | | 8x 01 04 6A 00 00 0p 0p FF | pp: Interval Time [Vertical timing] |
| CAM_Continuous FocusPosReply | On | 8x 01 04 16 02 FF | FocusPosition data Continuous Output On/Off |
| | Off (Reply) | 8x 01 04 16 03 FF y0 07 04 16 00 00 0p 0p 0p 0p FF | pppp: Focus Position |
| CAM_FosPosReply IntervalTimeSet | | 8x 01 04 6A 00 00 0p 0p FF | pp: Interval Time [Vertical timing] |
| CAM_Register Value | | 8x 01 04 24 mm 0p 0p FF | mm: Register No. (=00-7F) pp: Register Value (=00-7F) |



Command Set

| Command Set | Command | Packet | Comments |
|------------------------|--------------------------------|---|--|
| CAM_ ColorEnhance | Parameter Set On Off | 8x 01 04 20 mm nn pp qq rr FF 8x 01 04 50 02 FF 8x 01 04 50 03 FF | <p>mm: First byte from the top threshold value nn: Second byte from the top threshold value pp: Third byte from the top threshold value qq: Color specification for high-intensity rr: Color specification for low-intensity Range for mm, nn, and pp is 0 to F. Range for qq and rr is 0 to 8. Colors 0: Yellow, 1: Cyan, 2: Green, 3: White, 4: Magenta, 5: Red, 6: Blue, 7: Black, 8: Gray</p> <p>Color Enhancement ON/OFF</p> |
| CAM_ ChromaSuppress | | 8x 01 04 5F pp FF | <p>pp: Chroma Suppress setting level 00: OFF 1 to 3: ON (3 levels). Effect increases as the level number increases.</p> |
| CAM_ColorGain | Direct | 8x 01 04 49 00 00 00 0p FF | p: Color Gain setting 0h (60%) to Eh (200%) |
| CAM_ColorHue | Direct | 8x 01 04 4F 00 00 00 0p FF | p: Color Hue setting 0h (– 14 degrees) ~ Eh (+14 degrees) |
| CAM_HLC | | 8x 01 04 14 0p 0q FF | <p>p: HLC level (0: OFF, 1: ON) q: HLC mask level (0 to F: from low to high level)</p> |
| CAM_Menu | | 8x 01 06 06 pp FF | <p>pp: 2-ON 3-OFF 0-BACK 11-UP 12-DOWN 14-LEFT 18-RIGHT</p> |
| CAM_Contrast | Direct | 8x 01 7E 04 51 0p 0q FF | pq: 00 - 14h |



Register Set

| Command Set | Command | Packet | Comments |
|-----------------|---------|-------------------------|---|
| BaudRate | | 8x 01 04 24 00 00 0p FF | p: 0-9600 1-19200 2-38400 3-115200 |
| Monitoring Mode | | 8x 01 04 24 72 0p 0p FF | pp: 1-1080i@59.94 2-1080i@60 3- 4-1080i@50 5- 6-1080p@29.97 7-1080p@30 8-1080p@25 9-720p@59.94 A-720p@60 B- C-720p@50 D- E-720p@29.97 F-720p@30 10- 11-720p@25 12- 13-1080p@59.94 14-1080p@50 15-1080p@60 |
| Output enable | | 8x 01 04 24 73 00 0p FF | p: 1-CVBS On, LVDS/SDI Off 2-LVDS video On, CVBS/SDI Off 3-LVDS & CVBS On, SDI Off 4-SDI video On, CVBS//LVDS Off 5-SDI & CVBS On, LVDS Off 6-SDI & LVDS On CVBS Off 7-SDI & LVDS & CVBS On |
| LVDS Mode | | 8x 01 04 24 74 00 0p FF | p: 0-LVDS Single output 1-Dual Output |

**Register Set**

| Command Set | Command | Packet | Comments |
|----------------------------|---------|-------------------------|--|
| Key Input enable | | 8x 01 04 24 70 00 0p FF | p: 0-Key input disable 1-enable |
| Wide limit | | 8x 01 04 24 50 0p 0p FF | pp: 0~FF refer Table |
| Tele limit | | 8x 01 04 24 51 0p 0p FF | pp: 0~FF refer Table |
| D-Zoom Max | | 8x 01 04 24 52 0p 0p FF | pp: Max D-zoom ratio = 256/ (256-pp) |
| Stable Zoom | | 8x 01 04 24 53 00 0p FF | p: 0-OFF 1-ON |
| Focus Trace | | 8x 01 04 24 54 00 0p FF | p: 0-OFF 1-ON |
| Focus Offset | | 8x 01 04 24 55 0p 0p FF | pp: 0-FF |
| Auto Slow Shutter Limit | | 8x 01 04 24 59 00 0p FF | p: 1-1/30 2-1/15 3-1/8 4-1/4 5-1/2 6-1/1 |
| AF_InOutdoor | | 8x 01 04 24 4B 00 0p FF | p: 0-AF Indoor Mode 1-AF Outdoor Mode |

Compliments of Phase 1 Technology
phase1vision.com



Inquiry Command

| Inquiry Command | Command Packet | Inquiry Packet | Comments |
|--------------------------|----------------|----------------------|--|
| CAM_PowerInq | 8x 09 04 00 FF | y0 50 02 FF | On |
| | | y0 50 03 FF | Off(Standby) |
| CAM_ZoomPosInq | 8x 09 04 47 FF | y0 50 0p 0q 0r 0s FF | pqrs: Zoom Position (refer Table) |
| CAM_DZoomModelInq | 8x 09 04 06 FF | y0 50 02 FF | D-Zoom On |
| | | y0 50 03 FF | D-Zoom Off |
| CAM_Dzoom C/SModelInq | 8x 09 04 36 FF | y0 50 00 FF | Combine Mode |
| | | y0 50 01 FF | Separate Mode |
| CAM_DZoomPosInq | 8x 09 04 46 FF | y0 50 00 00 0p 0q FF | pq: D-Zoom Position |
| CAM_FocusModelInq | 8x 09 04 38 FF | y0 50 02 FF | Auto Focus |
| | | y0 50 03 FF | Manual Focus |
| CAM_FocusPosInq | 8x 09 04 48 FF | y0 50 0p 0q 0r 0s FF | pqrs: Focus Position (0x1000 - 0xC000) |
| CAM_FocusNearLimitInq | 8x 09 04 28 FF | y0 50 0p 0q 0r 0s FF | pqrs: Focus Near Limit Position |
| CAM_AFSensitivityInq | 8x 09 04 58 FF | y0 50 02 FF | AF Sensitivity Normal |
| | | y0 50 03 FF | AF Sensitivity Low |
| CAM_AFModelInq | 8x 09 04 57 FF | y0 50 00 FF | Normal AF |
| | | y0 50 01 FF | Interval AF |
| | | y0 50 02 FF | Zoom Trigger AF |
| CAM_AFTimeSettingInq | 8x 09 04 27 FF | y0 50 0p 0q 0r 0s FF | pq: Movement Time rs: Interval Time |
| CAM_IRCorrectionInq | 8x 09 04 11 FF | y0 50 02 FF | Standard |
| | | y0 50 03 FF | IR Light |
| CAM_WBModelInq | 8x 09 04 35 FF | y0 50 00 FF | Auto |
| | | y0 50 01 FF | InDoor |
| | | y0 50 02 FF | OutDoor |
| | | y0 50 03 FF | One Push WB |
| | | y0 50 04 FF | ATW |
| | | y0 50 05 FF | Manual |
| | | y0 50 06 FF | Outdoor Auto |
| | | y0 50 07 FF | Sodium Lamp Auto |
| y0 50 08 FF | Sodium Lamp | | |
| CAM_RGainInq | 8x 09 04 43 FF | y0 50 00 00 0p 0q FF | pq: R Gain |
| CAM_BGainInq | 8x 09 04 44 FF | y0 50 00 00 0p 0q FF | pq: B Gain |



Inquiry Command

| Inquiry Command | Command Packet | Inquiry Packet | Comments |
|------------------------|----------------|--|---|
| CAM_AEModeInq | 8x 09 04 39 FF | y0 50 00 FF | Full Auto |
| | | y0 50 03 FF | Manual |
| | | y0 50 0A FF | Shutter Priority |
| | | y0 50 0B FF | Iris Priority |
| | | y0 50 0D FF | Bright |
| CAM_SlowShutterModeInq | 8x 09 04 5A FF | y0 50 02 FF | Auto |
| | | y0 50 03 FF | Manual |
| CAM_ShutterPosInq | 8x 09 04 4A FF | y0 50 00 00 0p 0q FF | pp: Shutter Position |
| CAM_IrisPosInq | 8x 09 04 4B FF | y0 50 00 00 0p 0q FF | pp: Iris Position |
| CAM_GainPosInq | 8x 09 04 4C FF | y0 50 00 00 0p 0q FF | pp: Gain Position |
| CAM_GainLimitInq | 8x 09 04 2C FF | y0 50 0p FF | p: Gain Limit |
| CAM_BrightPosInq | 8x 09 04 4D FF | y0 50 00 00 0p 0q FF | pp: Bright Position |
| CAM_ExpCompModeInq | 8x 09 04 3E FF | y0 50 02 FF | On |
| | | y0 50 03 FF | Off |
| CAM_ExpCompPosInq | 8x 09 04 4E FF | y0 50 00 00 0p 0q FF | pp: ExpComp Position |
| CAM_BackLightModeInq | 8x 09 04 33 FF | y0 50 02 FF | On |
| | | y0 50 03 FF | Off |
| CAM_SpotAEModeInq | 8x 09 04 59 FF | y0 50 02 FF | On |
| | | y0 50 03 FF | Off |
| CAM_SpotAEPosInq | 8x 09 04 29 FF | y0 50 0p 0q 0r 0s FF | pp: X position rs: Y position |
| CAM_AE_ResponseInq | 8x 09 04 5D FF | y0 50 pp FF | pp: 01 to 0x20 |
| CAM_WDModeInq | 8x 09 04 3D FF | y0 50 02 FF | On Wide-D |
| | | y0 50 03 FF | Off |
| | | y0 50 06 FF | VE On |
| CAM_WDParameterInq | 8x 09 04 2D FF | y0 50 0p 0p 0q 0r 0s 0t 0u 00 00 FF | q: Display brightness level (0: Dark to 6: Bright) r: Brightness compensation selection (0: Very dark, 1: Dark, 2: Standard, 3: Bright) s: Compensation level (0: Low, 1: Mid, 2: High) tu: 0 |



Inquiry Command

| Inquiry Command | Command Packet | Inquiry Packet | Comments |
|------------------------|------------------------------------|---|--|
| CAM_DefogInq | 8x 09 04 37 FF | y0 50 02 0p FF y0 50 03 00 FF | On p: Defog level (0: auto, 1: low, 2: mid, 3: high) Off |
| CAM_ApertureInq | 8x 09 04 42 FF | y0 50 00 00 0p 0q FF | pp: Aperture Gain |
| CAM_HRModelInq | 8x 09 04 52 FF | y0 50 02 FF y0 50 03 FF | On (Hi-Resolution) Off |
| CAM_NRModelInq | 8x 09 04 53 FF | y0 50 0p FF | Noise Reduction p: (0: OFF, level 1 to 3) |
| CAM_GammaInq | 8x 09 04 5B FF | y0 50 0p FF | Gamma p: 0 to 4 |
| CAM_GammaOffsetInq | 8x 09 04 1E FF | y0 50 00 00 00 0s 0t 0u FF | s: Polarity offset (0 is plus, 1 is minus) tu: Offset s=0 (00h to 40h) Offset s=1 (00h to 10h) |
| CAM_HighSensitivityInq | 8x 09 04 5E FF | y0 50 02 FF y0 50 03 FF | On Off |
| LR_ReverseModelInq | 8x 09 04 61 FF | y0 50 02 FF y0 50 03 FF | On Off |
| FreezeModelInq | 8x 09 04 62 FF | y0 50 02 FF y0 50 03 FF | On Off |
| PictureEffectModelInq | 8x 09 04 63 FF | y0 50 00 FF y0 50 02 FF y0 50 04 FF | Off Neg.Art B&W |
| PictureFlipModelInq | 8x 09 04 66 FF | y0 50 02 FF y0 50 03 FF | On Off |
| ICRModelInq | 8x 09 04 01 FF | y0 50 02 FF y0 50 03 FF | On Off |
| AutoICRModelInq | 8x 09 04 51 FF | y0 50 02 FF y0 50 03 FF | On Off |
| AutoICRThresholdInq | 8x 09 04 21 FF | y0 50 00 00 0p 0q FF | pp: ICR ON - OFF Threshold Level |
| AutoICRAAlarmReplyInq | 8x 09 04 31 FF | y0 50 02 FF y0 50 03 FF | On Off |
| MemoryInq | 8x 09 04 3F FF | y0 50 pp FF | pp: Memory number recalled last |
| MemSaveInq | 8x 09 04 23 0X FF | y0 50 0p 0p 0q 0q FF | X: 00 to 07 (Address) ppqq: 0x0000 to 0xFFFF (Data) |
| DisplayModelInq | 8x 09 04 15 FF (8x 09 06 06 FF) | y0 50 02 FF y0 50 03 FF | On Off |



Inquiry Command

| Inquiry Command | Command Packet | Inquiry Packet | Comments |
|----------------------|-------------------|---|--|
| StabilizerModelInq | 8x 09 04 34 FF | y0 50 02 FF | On |
| | | y0 50 03 FF | Off |
| | | y0 50 00 FF | Hold |
| TitleDisplayModelInq | 8x 09 04 74 FF | y0 50 02 FF | On |
| | (8x 09 06 06 FF) | y0 50 03 FF | Off |
| MuteModelInq | 8x 09 04 75 FF | y0 50 02 FF | On |
| | | y0 50 03 FF | Off |
| PrivacyDisplayInq | 8x 09 04 77 FF | y0 50 pp pp pp pp FF | pp pp pp pp: Mask Display (0: OFF 1: ON) |
| PrivacyPanTiltInq | 8x 09 04 79 FF | y0 50 0p 0p 0p 0q 0q 0q FF | ppp: Pan qqq: Tilt |
| PrivacyPTZInq | 8x 09 04 7B mm FF | y0 50 0p 0p 0p 0q 0q 0q 0r 0r 0r 0r FF | mm: Mask Settings ppp: Pan qqq: Tilt rrrr: Zoom |
| PrivacyMonitorInq | 8x 09 04 6F FF | y0 50 pp pp pp pp FF | pp pp pp pp: Mask is displayed now. |
| CAM_KeyLockInq | 8x 09 04 17 FF | y0 50 00 FF | Off |
| | | y0 50 02 FF | On |
| CAM_IDInq | 8x 09 04 22 FF | y0 50 0p 0q 0r 0s FF | pqrs: Camera ID |
| CAM_VersionInq | 8x 09 00 02 FF | y0 50 gg gg mn pq rs tu vw FF | gggg: Vender ID (00bc) mnpq: Model Code rstu: ROM version vw: Socket Number (=02) |
| AlarmInq | 8x 09 04 6B FF | y0 50 02 FF | On |
| | | y0 50 03 FF | Off |
| MDModelInq | 8x 09 04 1B FF | y0 50 02 FF | On |
| | | y0 50 03 FF | Off |



Inquiry Command

| Inquiry Command | Command Packet | Inquiry Packet | Comments |
|----------------------|-------------------|----------------------------|---|
| MDFunctionInq | 8x 09 04 1C FF | y0 50 0m 0n 0p 0q 0r 0s FF | m: Display mode 0-Off 1-On n: Detection Frame Set bit0-Frame0 bit1-Frame1 bit2-Frame2 pq: Threshold Level (0 to 0x14) rs: Interval Time set (0 to 0xF) |
| MDWindowInq | 8x 09 04 1D 0m FF | y0 50 pp qq rr ss FF | m: Select Detection Frame (0 1 2 3) pp: Start Horizontal Position (00 to 0x3C) qq: Start Vertical Position (00 to 0x28) rr: Stop Horizontal Position (01 to 0x3C) ss: Stop Vertical Position (01 to 0x28) |
| ContinuousZoomPos | 8x 09 04 69 FF | y0 50 02 FF | On |
| ReplyModelInq | | y0 50 03 FF | Off |
| ReplyIntervalTimeInq | 8x 09 04 6A FF | y0 50 00 00 0p 0p FF | pp: Interval Time [VD timing] |
| ColorEnhanceInq | 8x 09 04 20 FF | y0 50 mm nn pp qq rr FF | mm: First byte from the top threshold value nn: Second byte from the top threshold value pp: Third byte from the top threshold value qq: Color specification for high-intensity rr: Color specification for low-intensity 0: Yellow 1:Cyan 2:Green 3:White 4: Magenta 5:Red 6:Blue 7:Black 8:Gray |
| | 8x 09 04 50 FF | y0 50 02 FF | On |
| | | y0 50 03 FF | Off |
| ChromaSuppressInq | 8x 09 04 5F FF | y0 50 pp FF | pp: Chroma Suppress setting level |
| ColorGainInq | 8x 09 04 49 FF | y0 50 00 00 00 0p FF | p: Color Gain setting 0h (60%) to Eh (200%) |
| ColorHueInq | 8x 09 04 4F FF | y0 50 00 00 00 0p FF | p: Color Hue setting 0h (? 14 degrees) ~ Eh (+ 14 degrees) |
| CAM_TempInq | 8x 09 04 68 FF | y0 50 00 00 0p 0q FF | pq : Current Temperature 0(0°C) ~ 0x7F(127 °C) |
| CAM_HLCInq | 8x 09 04 14 FF | y0 50 0p 0q FF | p: HLC level (0: OFF, 1: ON) q: HLC mask level (0 to F: from low to high level) |
| CAM_Menu | 8x 09 06 06 FF | y0 50 0p FF | p: 2-ON 3-OFF |
| CAM_Contrast | 8x 09 7E 04 51 FF | y0 50 0p 0q FF | pq: 00 ~ 14h |



Inquiry Command : Register

| Inquiry Command | Command Packet | Inquiry Packet | Comments |
|-----------------|-------------------|----------------|--|
| BaudRate | 8x 09 04 24 00 FF | y0 50 00 0p FF | p: 0-9600 1-19200 2-38400 3-115200 |
| Monitoring Mode | 8x 09 04 24 72 FF | y0 50 0p 0p FF | pp: 1-1080i@59.94 2--1080i@60 3- 4-1080i@50 5- 6-1080p@29.97 7-1080p@30 8-1080p@25 9-720p@59.94 A-720p@60 B- C-720p@50 D- E-720p@29.97 F-720p@30 10- 11-720p@25 12- 13-1080p@59.94 14-1080p@50 15-1080p@60 |
| Output enable | 8x 09 04 24 73 FF | y0 50 00 0p FF | p: 1-CVBS On, LVDS/SDI Off 2-LVDS video On, CVBS/SDI Off 3-LVDS & CVBS On, SDI Off 4-SDI video On, CVBS//LVDS Off 5-SDI & CVBS On, LVDS Off 6-SDI & LVDS On CVBS Off 7-SDI & LVDS & CVBS On |
| LVDS Mode | 8x 09 04 24 74 FF | y0 50 00 0p FF | p: 0-LVDS Single output 1-Dual output |

**Inquiry Command : Register**

| Inquiry Command | Command Packet | Inquiry Packet | Comments |
|----------------------------|-----------------------|-----------------------|--|
| Key Input enable | 8x 09 04 24 70 FF | y0 50 00 0p FF | p: 0-Key input disable 1-enable |
| Wide limit | 8x 09 04 24 50 FF | y0 50 0p 0p FF | pp: 0~FF refer Table |
| Tele limit | 8x 09 04 24 51 FF | y0 50 0p 0p FF | pp: 0~FF refer Table |
| E-Zoom Max | 8x 09 04 24 52 FF | y0 50 0p 0p FF | pp: Max D-zoom ratio = 256/ (256-pp) |
| Stable Zoom | 8x 09 04 24 53 FF | y0 50 00 0p FF | p: 0-OFF 1-ON |
| Focus Trace | 8x 09 04 24 54 FF | y0 50 00 0p FF | p: 0-OFF 1-ON |
| Focus Offset | 8x 09 04 24 55 FF | y0 50 00 pp FF | pp: 0-FF |
| Auto Slow Shutter Limit | 8x 09 04 24 59 FF | y0 50 00 0p FF | p: 1-1/30 2-1/15 3-1/8 4-1/4 5-1/2 6-1/1 |
| AF_InOutdoor | 8x 09 04 24 4B FF | y0 50 00 0p FF | p: 0-AF Indoor Mode 1-AF Outdoor Mode |



Block Inquiry Command

| Inquiry Command | Command Packet | Inquiry Packet | Comments |
|--------------------------------|-------------------|--|---|
| Lens Control System Inquiry | 8x 09 7E 7E 00 FF | y0 50 0p 0p 0p 0p 0q 0q 0r 0r 0r 0r 00 hh 0m FF | <p>pppp: Zoom position</p> <p>qq: Near limit 0-30Cm, 1-1M, 2-1.5M, 3-2M, 4-3M, 5-5M, 6-10M</p> <p>rrrr: Focus position</p> <p>hh: [5]DzoomMode 0-combine 1-seperate [4:3] 0-Nor 1-Interval 2-ztrg [2]AF sensitivity 0-slow 1-Nor [1]Dzoom 0-off 1-on [0]FocusMode 0-Manual 1-Auto</p> <p><i>m: [3]Low contrast detection 0-no 1-yes</i></p> <p>[2]Camera memory recall 0-stopped 1-executing [1]Focus command 0-stopped 1-executing [0]Zoom command 0-stopped 1-executing</p> |
| | 8x 09 7E 7E 01 FF | y0 50 0p 0p 0q 0q 0r 0s 0t hh mm nn 0u vv 0w FF | <p>pp: Rgain</p> <p>qq: Bgain</p> <p>r: WB mode</p> <p>s: Aperture gain</p> <p>t: Exposue Mode</p> <p>hh: [5]High resolution 0-off 1-on [4]Wide-D 0-off 1-other than off [3]Spot AE 0-off 1-on [2]Back Light 0-off 1-on [1]Exposure comp. 0-off 1-on [0]slow shutter 0-Manual 1-Auto</p> <p>mm: Shutter position</p> <p>nn: Iris position</p> <p>u: Gain position</p> <p>vv: Bright position</p> <p>w: Exposure Comp. position</p> |



Block Inquiry Command

| Inquiry Command | Command Packet | Inquiry Packet | Comments |
|-------------------|----------------|--|--|
| | | | p: [3]Auto ICR alarm 0-off 1-on [2]Auto ICR 0-off 1-on [1]0 [0]power 0-off 1-on |
| | | | qq: [6]Stabilizer 0-off 1-on [5]Stabilizer Hold 0-off 1-Hold [4]ICR 0-off 1-on [3]Freeze 0-off 1-on [2]LR Reverse 0-off 1-on |
| | | | rr: [5]Privacy zone 0-off 1-on |
| 8x 09 7E 7E 02 FF | | y0 50 0p qq rr 0s 00 00 0t 0t 0t 0t hh 00 00 FF | [4]Mute 0-off 1-on [3]Title display 0-off 1-on [2]Display 0-off 1-on |
| | | | s: Picture Effect Mode [2]B&W 0-off1-on [1]Neg.Art 0-off1-on |
| | | | ttt: Cam ID |
| | | | hh: [4]Memory 0-not provided 1-provided [3]0 [2]ICR 0-not provided 1-provided [1]Stabilizer 0-Not provided 1-Provided [0]0-1/60,1/30 1-1/50,1/25 |



Block Inquiry Command

| Inquiry Command | Command Packet | Inquiry Packet | Comments |
|-----------------|-------------------|--|---|
| | | | pp: Dzoom position qq: AF activation time rr: AF Interval time s: SpotAE position X t: SpotAE position Y u: [2]MD 0-off 1-on [1]Alarm 0-off 1-on [0]flip 0-off 1-on vv: [6:3]color gain [2]Advanced privacy 0-not provided [1]Alarm 1- provided [0]flip 1- provided hh: AE response mm: [6:4]Gamma [3]High Sensitivity mode 0-off 1-on [2:0]NR level nn: [6:4]Chroma suppression [3:0]Gain limit |
| | 8x 09 7E 7E 03 FF | y0 50 0p 0p 0q 0q 0r 0r 0s 0t 0u vv hh mm nn FF | |
| | | | p: WideD mode 0-off 1-on 2-VE On r: Display brightness level setting 0: Dark to 6: Brightt s: Brightness compensation selection 0: Very dark 1: Dark 2: Standard 3: Bright t: Compensation level 0: Low 1: Mid 2: High u: [0]Defog 0-off 1-on v: [1:0] Defog Level 0:auto 1:low 2:mid 3:high |
| | 8x 09 7E 7E 04 FF | y0 50 0p 0q 0r 0s 0t 0u 0v 00 00 00 00 00.00 FF | |
| | | | p: Color Hue |
| | 8x 09 7E 7E 05 FF | y0 50 0p 00 00 00 00 00 00 00 00 00 00 00 FF | |

**TABLE.****Shutter Speed**

| Value | NTSC | PAL |
|-------|-------------------|-------------------|
| 15 | 1/10000 (1/20000) | 1/10000 (1/20000) |
| 14 | 1/6000 (1/12000) | 1/6000 (1/12000) |
| 13 | 1/4000 (1/8000) | 1/3500 (1/7000) |
| 12 | 1/3000 (1/6000) | 1/2500 (1/5000) |
| 11 | 1/2000 (1/4000) | 1/1750 (1/3500) |
| 10 | 1/1500 (1/3000) | 1/1250 (1/2500) |
| 0F | 1/1000 (1/2000) | 1/1000 (1/2000) |
| 0E | 1/725 (1/1450) | 1/600 (1/1200) |
| 0D | 1/500 (1/1000) | 1/425 (1/850) |
| 0C | 1/350 (1/700) | 1/300 (1/600) |
| 0B | 1/250 (1/500) | 1/215 (1/430) |
| 0A | 1/180 (1/360) | 1/150 (1/300) |
| 09 | 1/125 (1/250) | 1/120 (1/240) |
| 08 | 1/100 (1/200) | 1/100 (1/200) |
| 07 | 1/90 (1/180) | 1/75 (1/150) |
| 06 | 1/60 (1/120) | 1/50 (1/100) |
| 05 | 1/30 (1/60) | 1/25 (1/50) |
| 04 | 1/15 (1/30) | 1/12 (1/25) |
| 03 | 1/8 (1/15) | 1/6 (1/12) |
| 02 | 1/4 (1/8) | 1/3 (1/6) |
| 01 | 1/2 (1/4) | 1/2 (1/3) |
| 00 | 1/1 (1/2) | 1/1 (1/2) |

IRIS

| Value | F no. |
|-------|-------|
| 11 | F1.5 |
| 10 | F2 |
| 0F | F2.4 |
| 0E | F2.8 |
| 0D | F3.4 |
| 0C | F4 |
| 0B | F4.8 |
| 0A | F5.6 |
| 09 | F6.8 |
| 08 | F8 |
| 07 | F9.6 |
| 06 | F11 |
| 05 | F14 |
| 00 | CLOSE |

**Gain**

| Value | dB | |
|-------|--------|--|
| 0F | +50 dB | |
| 0E | +47 dB | |
| 0D | +43 dB | |
| 0C | +40 dB | |
| 0B | +37 dB | |
| 0A | +33 dB | |
| 09 | +30 dB | |
| 08 | +27 dB | |
| 07 | +23 dB | |
| 06 | +20 dB | |
| 05 | +17 dB | |
| 04 | +13 dB | |
| 03 | +10 dB | |
| 02 | +7 dB | |
| 01 | 0 dB | |
| 00 | 0 dB | |

Gain Limit

| Value | dB | |
|-------|--------|--|
| 0F | +50 dB | |
| 0E | +47 dB | |
| 0D | +43 dB | |
| 0C | +40 dB | |
| 0B | +37 dB | |
| 0A | +33 dB | |
| 09 | +30 dB | |
| 08 | +27 dB | |
| 07 | +23 dB | |
| 06 | +20 dB | |
| 05 | +17 dB | |
| 04 | +13 dB | |

Brightness

| Value | IRIS | GAIN |
|-------|-------|--------|
| 1F | F1.6 | +50 dB |
| 1E | F1.6 | +47 dB |
| 1D | F1.6 | +43 dB |
| 1C | F1.6 | +40 dB |
| 1B | F1.6 | +37 dB |
| 1A | F1.6 | +33 dB |
| 19 | F1.6 | +30 dB |
| 18 | F1.6 | +27 dB |
| 17 | F1.6 | +23 dB |
| 16 | F1.6 | +20 dB |
| 15 | F1.6 | +17 dB |
| 14 | F1.6 | +13 dB |
| 13 | F1.6 | +10 dB |
| 12 | F1.6 | +6 dB |
| 11 | F1.6 | 0 dB |
| 10 | F2 | 0 dB |
| 0F | F2.4 | 0 dB |
| 0E | F2.8 | 0 dB |
| 0D | F3.4 | 0 dB |
| 0C | F4 | 0 dB |
| 0B | F4.8 | 0 dB |
| 0A | F5.6 | 0 dB |
| 09 | F6.8 | 0 dB |
| 08 | F8 | 0 dB |
| 07 | F9.6 | 0 dB |
| 06 | F11 | 0 dB |
| 05 | F14 | 0 dB |
| 00 | CLOSE | 0 dB |



| Zoom Ratio | Zoom Ratio | Position Data | | Zoom Ratio | Position Data |
|--------------|------------|---------------|--|------------|---------------|
| Optical Zoom | ×1 | 0000 | | ×21 | 3E68 |
| | ×2 | 1538 | | ×22 | 3EBD |
| | ×3 | 1F29 | | ×23 | 3EFE |
| | ×4 | 253E | | ×24 | 3F3E |
| | ×5 | 2985 | | ×25 | 3F69 |
| | ×6 | 2CBF | | ×26 | 3F94 |
| | ×7 | 2F64 | | ×27 | 3FBF |
| | ×8 | 3192 | | ×28 | 3FD5 |
| | ×9 | 3375 | | ×29 | 3FEA |
| | ×10 | 3518 | | ×30 | 4000 |
| | ×11 | 3690 | | | |
| | ×12 | 37DD | | | |
| | ×13 | 3909 | | | |
| | ×14 | 3A16 | | | |
| | ×15 | 3B02 | | | |
| | ×16 | 3BCE | | | |
| | ×17 | 3C84 | | | |
| | ×18 | 3D1B | | | |
| | ×19 | 3D9C | | | |
| | ×20 | 3E07 | | | |
| Digital Zoom | ×1 | 4000 | | | |
| | ×2 | 6000 | | | |
| | ×3 | 6A80 | | | |
| | ×4 | 7000 | | | |
| | ×5 | 7300 | | | |
| | ×6 | 7540 | | | |
| | ×7 | 76C0 | | | |
| | ×8 | 7800 | | | |
| | ×9 | 78C0 | | | |
| | ×10 | 7980 | | | |
| | ×11 | 7A00 | | | |
| | ×12 | 7AC0 | | | |



| Limit Setting Value | Wide Limit | Tele Limit |
|---------------------|------------|------------|
| 00 | x1.0 | X30 |
| 03 | | X29 |
| 06 | | X28 |
| 09 | | X27 |
| 0C | | X26 |
| 10 | X2 | X25 |
| 18 | | X24 |
| 20 | X3 | X23 |
| 28 | | X22 |
| 30 | X4 | X21 |
| 38 | | X20 |
| 40 | X5 | X19 |
| 50 | X6 | X18 |
| 60 | X7 | X17 |
| 70 | X8 | X16 |
| 80 | X9 | X15 |
| 90 | X10 | X14 |
| A0 | X11 | X13 |
| B0 | X12 | |
| C0 | X13 | X12 |
| D0 | X14 | X11 |
| E0 | X15 | |
| F0 | X16 | X10 |



APPENDIX B

PELCO Protocol

PELCO "D" Byte Format

Command Message

| Command | Data | | | | | | |
|-------------|--------|--------|--------|--------|--------|--------|----------|
| | BYTE 1 | BYTE 2 | BYTE 3 | BYTE 4 | BYTE 5 | BYTE 6 | BYTE 7 |
| Zoom Tele | 0xFF | CamID | 0x00 | 0x20 | 0x00 | 0x00 | Checksum |
| Zoom Wide | 0xFF | CamID | 0x00 | 0x40 | 0x00 | 0x00 | Checksum |
| Focus Near | 0xFF | CamID | 0x01 | 0x00 | 0x00 | 0x00 | Checksum |
| Focus Far | 0xFF | CamID | 0x00 | 0x80 | 0x00 | 0x00 | Checksum |
| Up(Menu) | 0xFF | CamID | 0x00 | 0x08 | 0x00 | 0x00 | Checksum |
| Down(Menu) | 0xFF | CamID | 0x00 | 0x10 | 0x00 | 0x00 | Checksum |
| Left(Menu) | 0xFF | CamID | 0x00 | 0x04 | 0x00 | 0x00 | Checksum |
| Right(Menu) | 0xFF | CamID | 0x00 | 0x02 | 0x00 | 0x00 | Checksum |
| Menu On/Off | 0xFF | CamID | 0x40 | 0x00 | 0x00 | 0x00 | Checksum |
| STOP | 0xFF | CamID | 0x00 | 0x00 | **** | **** | Checksum |

Pelco Keyboard (95+PATTERN)

| Function | Menu On / Off | | | | | | |
|----------|---------------|--------|--------|--------|--------|--------|----------|
| | BYTE 1 | BYTE 2 | BYTE 3 | BYTE 4 | BYTE 5 | BYTE 6 | BYTE 7 |
| MSG | 0xFF | CamID | 0x00 | 0x23 | 0x00 | 0x5F | Checksum |

V/D Keyboard (Set Preset +98)

| Function | Menu On / Off | | | | | | |
|----------|---------------|--------|--------|--------|--------|--------|----------|
| | BYTE 1 | BYTE 2 | BYTE 3 | BYTE 4 | BYTE 5 | BYTE 6 | BYTE 7 |
| MSG | 0xFF | CamID | 0x00 | 0x03 | 0x00 | 0x62 | Checksum |