

# Pixelink®

A NANITAR COMPANY

## PL-D797

### CMOS | SONY IMX428 | GLOBAL SHUTTER

The Pixelink PL-D797 camera is based on the Sony IMX428 3<sup>rd</sup> generation Pregius CMOS shutter sensor technology and is available in color and monochrome versions. The Pixelink PL-D797 camera has a 7.1 megapixel resolution, 1.1" lens format, a 17.60mm sensor diagonal and dynamic range of 72 dB. This camera is the lower frame rate counterpart to the existing PL-D757 model which features the Sony IMX420 sensor.

The PL-D797 camera is USB3 Vision compliant and is available in board level or enclosed configurations, with or without an external trigger. This model is the perfect product solution for customers who want a high quality camera, yet don't require the higher frame rate feature traditionally associated with Sony Pregius image sensors.

As with all Pixelink cameras, the new PL-D797 models are compatible with Pixelink Capture, a free, real-time, interactive, multi-camera software application.



### KEY FEATURES

7.1MP  
CMOS

26  
FRAMES  
Per Sec.

4.5µm

17.6mm

Sensor  
Size  
1.1"

12 BIT

COLOR

MONO

USB 3.0

US3  
VISION

### TYPICAL APPLICATIONS

Parts Inspection  
Strength Testing  
Metrology

Biometrics  
Medical Imaging  
PCB & Flat Panel Display Inspection

## TECHNICAL SPECIFICATIONS

### SENSOR

Sensor	Sony IMX428
Type	CMOS Global Shutter
Resolution	7.1MP (3208 x 2200)
Pixel Pitch	4.5 $\mu$ m x 4.5 $\mu$ m
Active Area	17.6 mm diagonal

### PERFORMANCE SPECIFICATIONS

FPN	< 0.03% of signal
PRNU	< 0.4% of signal
Dynamic Range	72 dB
Bit Depth	12-bit
Color Data Formats	Bayer 8, Bayer 12 Packed, Bayer 16 & YUV422
Mono Data Formats	Mono 8, Mono 12 Packed & Mono 16

### FRAME RATES

Resolution	Free Running
3208 x 2200	26.5 fps
1280 x 1024	54.7 fps
640 x 480	108.9 fps
Frame rates will vary based on host system and configuration	
*Above calculations based on fixed frame rate mode	

### INTERFACES

Interface   Data rate	USB 3.0   Micro-B   5Gbps
Board Level Trigger Connector	8-pin Molex 1.25mm pitch
Enclosed Trigger Connector	Hirose round 8-pin
Trigger	Software and hardware
Board Level Trigger Input	1 input, 3.3V (with internal pullup resistor)
Enclosed Trigger Input	1 optically isolated, 5-12V DC at 4-11 mA
Board Level GPO/Strobe	2 outputs, 3.3V
Enclosed GPO/Strobe	2 outputs, 3.3V and 1 optically isolated max 40V DC, max 15mA
GPI	1 input, 3.3V (with internal pullup resistor)

### MECHANICALS

Dimensions (mm)	55 x 38.5 x 30.29
Weight (g)	35.8 (Board level without optics)
Mounting	C, S-Mount

### POWER REQUIREMENTS

Voltage Required	5V DC (from USB connector)
------------------	----------------------------

### PIN NAME & FUNCTION

1	3.3V power output
2	TRIGGER/GPI 3.3V HCMOS input
3	Ground
4	GPO1, 3.3V HCMOS output
5	GPO2, 3.3V HCMOS output
6	Clock, 3.3V (I2C access for OEMs)
7	Data, 3.3V (I2C access for OEMs)
8	No connection
Board connector: Molex (8-pin, 1.25mm pitch, vertical); Cable receptacle: Molex 51021-0800; Cable crimp terminals: Molex 50079-8100	

### ENCLOSED GPIO INTERFACE PIN OUTPUT DESCRIPTION

1	VBUS (Power output from USB 3.0 cable)
2	TRIGGER + (optically isolated)
3	TRIGGER - (optically isolated)
4	GPO1 + (optically isolated)
5	GPO1 - (optically isolated)
6	GPO1, 3.3V HCMOS output (I2C - SCL for autofocus)
7	GPO2, 3.3V HCMOS output (I2C - SDA for autofocus)
8	Ground (logic and chassis ground)

### ENVIRONMENTAL & REGULATORY

Compliance	FCC, CE & RoHS
Shock & Vibration	300 G & 20 G (10Hz - 2KHz)
Operating Temperature	0°C to 50°C
Storage Temperature	-45°C to 85°C

### SOFTWARE


Pixelink Capture	Control & operate multi-camera
Pixelink SDK	Software Development Kit
Pixelink $\mu$ Scope	Acquisition, analysis & reporting
3rd. Party U3V Vision Applications	

### COMPUTER & OPERATING SYSTEM


	Windows	Linux x86	Linux ArmV7	Linux ArmV8
Processor	Intel i5 or better	Intel i5 or better	Arm7 (32 bit)	Arm8 (64 bit)
Memory	4GB recommended	4GB recommended	2GB	2GB
Hard Drive Space	150 MB	150 MB	50 MB	50 MB
Operating System	Windows 7/8/10	Ubuntu 14.04/16.04 Desktop	Ubuntu 14.04/16.04	Ubuntu 14.04/16.04

## MECHANICAL DRAWINGS & RESPONSIVITY CURVES


### MECHANICAL DRAWINGS

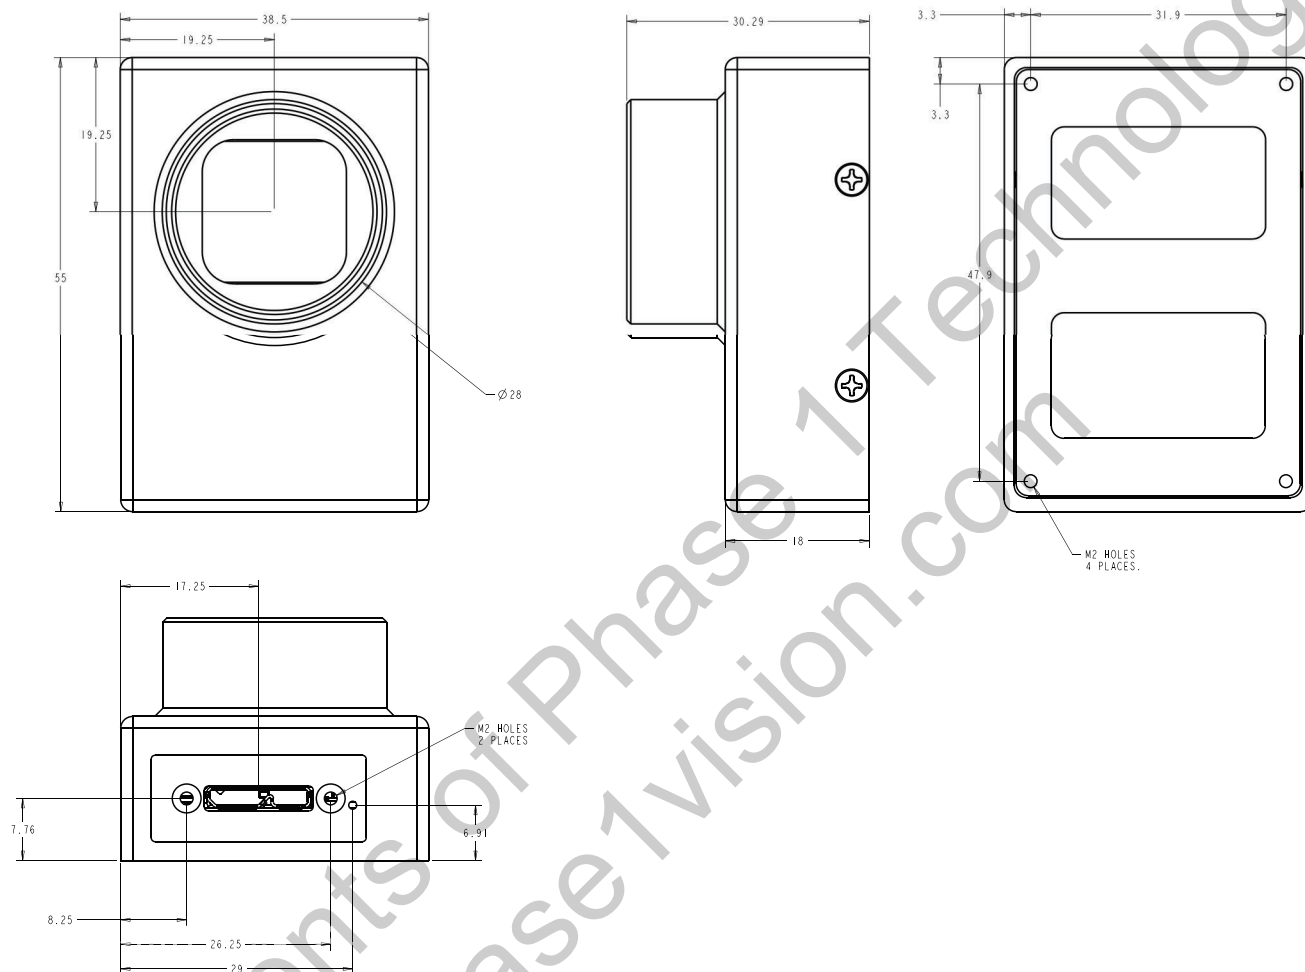

### RESPONSIVITY CURVE - COLOR

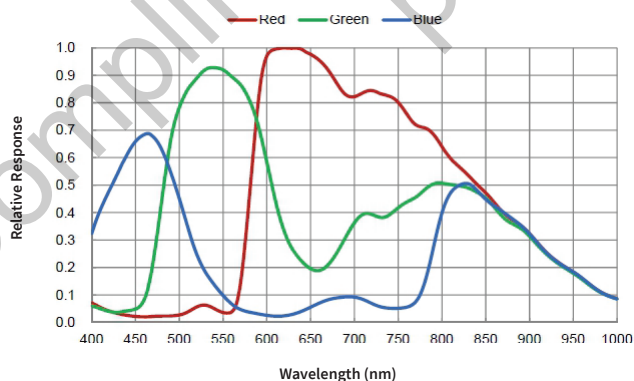

### RESPONSIVITY CURVE - MONO

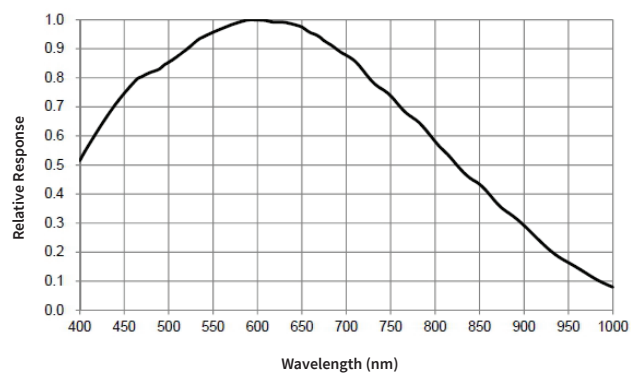

## PIXELINK'S INDUSTRY LEADING SOFTWARE

### PIXELINK CAPTURE

Pixelink Capture is powerful multi-camera software application designed to configure “n” numbers of cameras and stream “n” number of cameras simultaneously in real-time high-quality video viewed in a multi-window environment. Pixelink Capture offers options for complex image enhancements such as exposure control and filtering, in addition to multi-camera application testing and configuration.

Pixelink Capture also provides features to measure supporting point, line, circle, rectangle, polyline and polygon measurements while determining pixel location. The user can review and adjust the data before exporting the findings to an Excel spreadsheet for further analysis.

Pixelink Capture also has integrated lens control (zoom & focus) for Navitar motorized lenses and accurate autofocus options for Navitar motorized fine focus mechanisms.

For more information visit [pixelink.com](http://pixelink.com).

### PIXELINK SDK

Providing full control of all camera functions, the Pixelink Software Development Kit (SDK) is the software package of choice for developers and system integrators who are integrating Pixelink cameras into their applications. The Pixelink SDK provides access to the full Pixelink Application Programming Interface (API) and provides sample applications, wrappers for many 3rd party controls, such as LabVIEW, along with full documentation.

The Pixelink SDK is compatible with Microsoft Windows and popular Linux platforms. When using the Pixelink SDK, developers can integrate Pixelink cameras into their custom applications with ease.

## AVAILABLE CONFIGURATIONS

PL-D797CU  
PL-D797CU-BL  
PL-D797CU-T

PL-D797MU  
PL-D797MU-BL  
PL-D797MU-T

Color Space  
C = Color  
M = Mono  
NIR = Near Infrared

Interface  
F = Firewire  
G = GigE  
U = USB

Housing  
CS = CS Mount  
S-BL = S Mount Board Level  
BL = Board Level  
T = Trigger