



HB-25000-G-M Monochrome
HB-25000-G-C Color

*****PRELIMINARY*****



High Speed 25GigE SFP28 Interface
2.5x the Speed of 10GigE
Cable lengths from 1M to 10KM
No Fiber Converters Needed
No Frame Grabbers
GigE Vision Compliant



SONY
Pregius

GiGE
VISION
GEN<i>CAM

25GIGE CAMERAS


Speed is Everything.

*****PRELIMINARY*****


HB-25000-G SERIES - 25MP
HB-25000-G-M MONOCHROME / HB-25000-G-C COLOR



Spectral Sensitivity

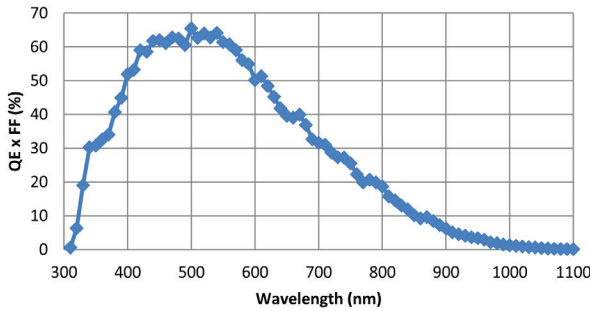

Front View Dimensions



58mm

Side View Dimensions



97mm

40mm

*Please refer to 3D Mechanicals available to download from our website for exact measurements

APPLICATIONS

- Broadcast Sports Technology
- Intelligent Traffic Systems
- Food and Beverage Inspection
- Diagnostic Analysis
- Semiconductor
- Automotive
- Medical Imaging

Sensor	GMAX0505
Resolution	5120 x 5120
Megapixels	26.21MP
Sensor Type	1.1" CMOS
Max Frame Rate	75 fps
Cell Size	2.5µm x 2.5µm
Standard Mount	C Mount
Shutter	Global
Bit Depth	8 & 12 bit
GPIO / Triggering	3 in, 3 out Software, External (Pulse or Edge)
Interface	SFP28 - 25GigE
Exposure/Integration	5µs-1s
Dynamic Range	>60dB @ 10bit / >65dB @ 12bit
Monochrome Modes	Mono8, Mono12, Mono12Packed
Color Modes	RGB8, RGB12, BGR8, BGR12, YUV411, YUV422, YUV444
Raw Modes	BayerRG8, BayerRG12, BayerRG12Packed
Operating System	Windows 10, Linux (64bit)
Compliance	CE, FCC, RoHS, WEEE, GigE Vision, GenICam
Power Requirements	9W, 12V
Operating Temperature	0C - 45C
Storage Temperature	-30C to +60C
Dimensions & Weight	97 x 58 x 40 - 250g
Warranty	2 Years

***Preliminary data. Subject to change.**

EMERGENT VISION TECHNOLOGIES

7-11720 Stewart Crescent
 Maple Ridge, British Columbia, V2X 9E7 Canada
 Ph: 1-866-780-6082 E-Mail: sales@emergentvisiontec.com
 emergentvisiontec.com

