

HR-12000-S-M MONOCHROME
HR-12000-S-C COLOR
HR-12000-S-PC POLARIZED-C
HR-12000-S-PM POLARIZED-M



High Speed 10GigE SFP+ Interface
10x the Speed of GigE
Cable lengths from 1M to 10KM
No Fiber Converters Needed
No Frame Grabbers
GigE Vision Compliant




HR-12000-S SERIES - 12MP

HR-12000-S-M MONOCHROME / HR-12000-S-C COLOR


HR-12000-S-PC POLARIZED-C / HR-12000-S-PM POLARIZED-M



Spectral Sensitivity

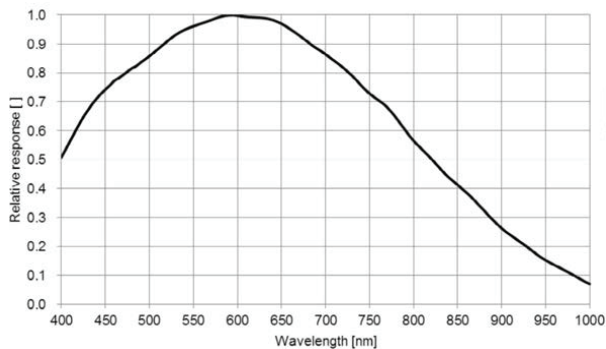

Front View Dimensions



58mm

Side View Dimensions



40mm

97mm

*Please refer to 3d Mechanicals available to download from our website for exact measurements

APPLICATIONS

Broadcast Sports Technology
Intelligent Traffic Systems
Food and Beverage Inspection
Diagnostic Analysis
Semiconductor
Automotive
Medical Imaging

Sensor	Sony IMX253LLR Sony IMX253LQR Sony IMX253MYR Sony IMX253MZR
Resolution	4096 x 3000
Megapixels	12MP
Sensor Type	1.1" CMOS
Max Frame Rate	80fps
Cell Size	3.45µm
Standard Mount	C Mount
Shutter	Global
Bit Depth	8, 12 bit
GPIO / Triggering	2 in, 4 out Software, External (Pulse or Edge)
Interface	SFP+ 10GigE
*Exposure/Integration	10µs-1s
Dynamic Range	71 dB
Monochrome Modes	Mono8, Mono12, Mono12Packed
Color Modes	RGB8, RGB12, BGR8, BGR12, YUV411, YUV422, YUV444
Raw Modes	BayerRG8, BayerRG12, BayerRG12Packed
Operating System	Windows 7/8/10, Linux (64bit)
Compliance	CE, FCC, RoHS, WEEE, GigE Vision, GenICam
Power Requirements	9W, 12V
Operating Temperature	0C - 45C
Storage Temperature	-30C to +60C
Dimensions & Weight	97 x 58 x 40 - 350g
Warranty	2 Years

*all minimum exposure specs can vary from what is listed based on the limitations of each sensor as per notice from the manufacturer.

EMERGENT VISION TECHNOLOGIES

7-11720 Stewart Crescent

Maple Ridge, British Columbia, V2X 9E7 Canada

Ph: 1-866-780-6082 E-Mail: sales@emergentvisiontec.com

emergentvisiontec.com