



# Specifications for FS-1600D-10GE

# Fusion Series

## Specifications FS-1600D-10GE


Sensor	1/2.9" 2-CMOS global shutter (IMX273)
Active pixels	1440 (h) x 1080 (v) x 2 (Bayer / NIR)
Frame rate, full frame	226 frames/sec. @ 8-bit
Active area	4.97 mm (h) x 3.73 mm (v) - 6.21 mm diagonal
Pixel size	3.45 μm x 3.45 μm
System clock	74.25 MHz (for pulse generator)
Read-out modes	Full ROI (single) 1440 (h) x 1080 (v) for each channel H: 16 to 1440 pixels in 16 pixel steps V: 8 to 1080 lines in 4 line steps Up to 4 areas can be defined. No overlap. 1x2, 2x1, 2x2 (NIR only)
EMVA 1288 Parameters	12-bit output format Absolute sensitivity 4.85 p (λ = 525 nm), 10.8 p (λ = 810 nm) Maximum SNR 39.65 dB green, 39.36 dB NIR
Traditional SNR* color NIR	>60 dB (0 dB gain, 10-bit) >60 dB (0 dB gain, 10-bit)
Video signal output† (Two streams)	Visible: BayerRG8, BayerRG10, BayerRG10Packed, BayerRG12, BayerRG12Packed, RGB8, RGB10V1Packed, RGB10p32 NIR: Mono8, Mono10, Mono10Packed, Mono12, Mono12Packed
Video modes	Normal, Single ROI, Multi ROI, Sequencer (2 modes)
Gain	Manual control - master mode 0 to +24 dB R/B channels - individually -7 to +15 dB Auto gain control - off, continuous, one-push
White balance (Color channel only)	Off, 4 presets (3200K, 5000K, 6500K, 7500K), or one-push/continuous AWB (3000K to 9000K)
Gamma/LUT	0.45 to 1.0 (9 steps) or 257-point programmable LUT
Shading correction	Flat shading, color shading
Trigger input	Opto In (2), Pulse Generators (4), Software, TTL In (2), NAND Out (2), User Output (2)
Exposure modes	Timed/EPS, Trigger Width (∞), Auto, Delayed readout option
Electronic shutter	(can be set independently for each channel) 15.26 μs to 8 sec. in 1 μs steps
Auto Level Control (ALC)	Shutter range from 100 μs, gain range from 0 dB to +24 dB. Tracking speeds and max. values adjustable.
Blemish compensation	0 to 200 px/channel
Operating temp. (ambient)	5°C to +35°C (20 to 80% non-condensing)
Storage temp. (ambient)	-20°C to +60°C (20 to 80% non-condensing)
Vibration	3G (20 Hz to 200 Hz XYZ directions)
Shock	50g
Regulations	CE (EN61000-2, EN61000-6-3) FCC Part 15 Class B, RoHS/WEEE
Power	12-pin +10V to +25V DC. 10.4 W typical @ +12 V
Lens mount	C-mount
Dimensions (H x W x L)	62 mm x 62 mm x 86.5 mm (excl. connectors)
Weight	270 g

## Ordering Information

FS-1600D-10GE	2-CMOS multi-spectral camera with GigE Vision
---------------	---

\*Traditional SNR is based on random noise in a single frame, where EMVA SNR measurements consider more comprehensive noise sources and variance over time.

## Dimensions

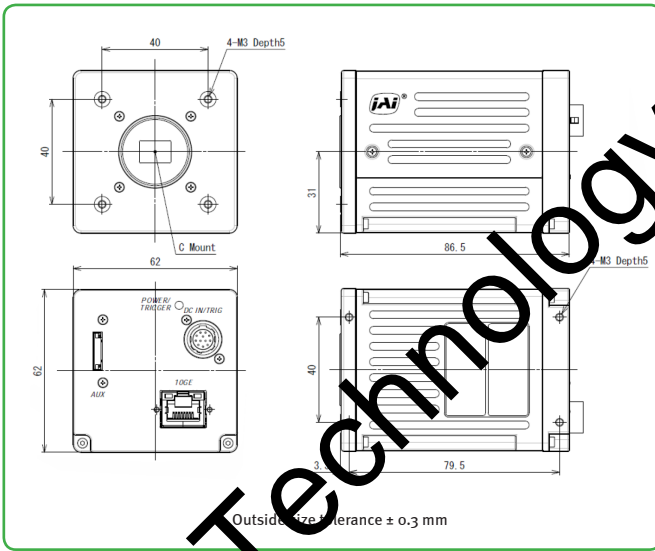

## Connector pin out

### DC In / Trigger

HIROSE Hirose HA-10-12PB(71)


Pin	Signal
1	Ground
2	DC In +10V to +25V
3	Opto In 2-
4	Opto In 2+
5	Opto In 1-
6	Opto In 1+
7	Opto Out 1-
8	Opto Out 1+
9	TTL out 1
10	TTL in 1
11	DC in +10V to +25 V
12	Ground

### GigE Vision Interface

RJ-45 with locking screws

Pin	Signal
1	TRD+ (0)
2	TRD- (0)
3	TRD+ (1)
4	TRD+ (2)
5	TRD- (2)
6	TRD- (1)
7	TRD+ (3)
8	TRD- (3)

## Spectral response

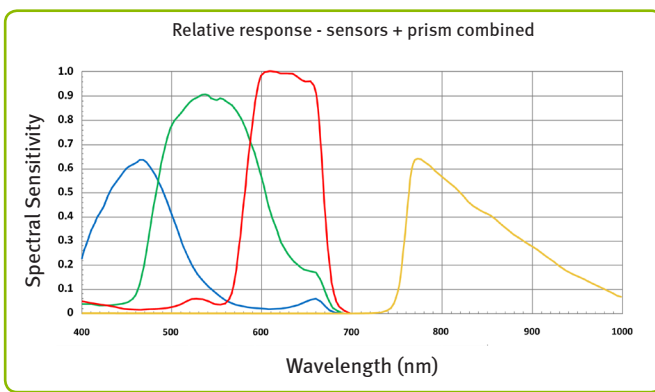

†12-bit output available in video processing bypass mode. See manual for details.

Compliments of Phase 1 Technology

**Europe, Middle East & Africa**  
Phone +45 4457 8888  
Fax +45 4491 8880

**Asia Pacific**  
Phone +81 45 440 0154  
Fax +81 45 440 0166

**Americas**  
Phone (Toll-Free) 1 800 445 5444  
Phone +1 408 383 0300

Visit our website on [www.jai.com](http://www.jai.com)

See the possibilities

Company and product names mentioned in this datasheet are trademarks or registered trademarks of their respective owners. JAI-A-S cannot be held responsible for any technical or typographical errors and reserves the right to make changes to products and documentation without prior notice. November 2019