

Part of the Teledyne Imaging Group

## Linea<sup>™</sup> HS Color 16k Multi-Array CMOS TDI Camera



## **Key Features**

- » High speed 100 kHz x 3
- » High sensitivity multi-array TDI
- » Capture three native colors
- » Bi-directionality
- » Next gen Camera Link HS interface

## **Programmability**

- » Multiple Regions of Interest for calibration, data reduction
- » 8 or 12 bit output
- » Flat field and lens shading correction
- » Programmable coefficient sets

## **Typical Applications**

- » Flat panel display inspection
- » Printed circuit board inspection
- » Semiconductor wafer
- » Life sciences
- » Web inspection
- » General purpose machine vision

# High Speed and High Sensitivity Color TDI Camera


Based on Teledyne DALSA's industry leading CMOS TDI technology, the new Linea HS color camera offers the most advanced performance for color imaging in the marketplace. This camera delivers the highest speeds and highest sensitivity for many demanding color applications. The camera comes with the next-generation CLHS interface, delivering up to 8.4 Gigapixels per second over a single active optical cable.


Specifications				
Resolution	16,384 x (64+128+64) pixels			
Line Rate	100 kHz x 3			
Pixel Size	5 x 5 μm			
Bit Depth	8 or 12 bit selectable			
Lens Mount	M90 x 1			
Responsivity	See graph			
Dynamic Range	69 dB			
Nominal Gain Range	1x ~10x			
Size	97 mm x 140.5 mm x 78.6 mm			
Mass	1200 g			
Operating Temp	emp 0°C to +60°C, front plate			
Power Supply	er Supply +12 to +24 VDC			
Power Dissipation	30 W			
Data & Control	Camera Link HS, CX4			
GPIO	Hironse 12-pin			
Regulatory Compliance	CE, FCC, and RoHS			

#### Camera Model

Part Number	Resolution	Max. Line Rate	Pixel Size	Output
HL-HC-16k10T	16,384 x (64+128+64) pixels	100 kHz x 3	5 x 5 μm	RGB


Part of the Teledyne Imaging Group

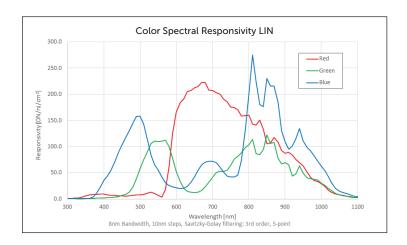




97+0.05

48.5±0.30

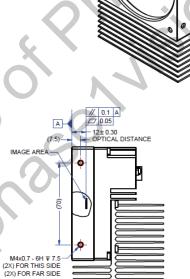





NOTES:
1. UNITS: MILLIMETERS.
2. IMAGE AREA IS ALIGNED TO DATUMS A B & C.

### Americas

В

48.5±0.30

FIRST PIXEL REFERENCE HOLE

97 ± 0.05 — (80) —

(140.5)

Boston, USA +1 978-670-2000 sales.americas@teledynedalsa.com

## Europe

M90×1.0

CENTER OF IMAGE AREA

-M4x0.7 - 6H ▼ 7 (4X)

> Krailling, Germany +49 89-89-54-57-3-80 sales.europe@teledynedalsa.com

## Asia Pacific

Tokyo, Japan +81 3-5960-6353 sales.asia@teledynedalsa.com Shanghai, China +86 21-3368-0027 sales.asia@teledynedalsa.com