


XTIUM™ 2 CLHS PX8

A High-Performance Frame Grabber for PCIe Gen3 Platform

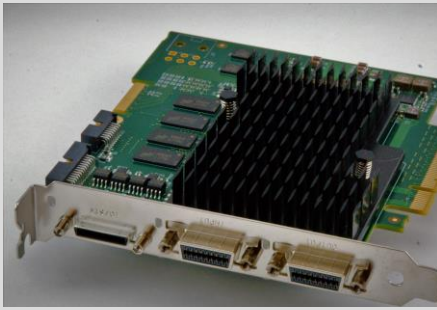

Key Features

- Half-length PCI Express Gen 3.0 x8 Board
- CameraLink® HS compliant
- Supports acquisition rates up to 7.0 GB/sec
- Host transfers up to 6.8 GB/sec
- Data forwarding for distributed image processing
- Field proven optical(AOC) and copper(CX4) cabling
- Microsoft® Windows® 7, 8 & 10 (32/64-bit), WOW64 and Linux¹
- Fully supported by Spera Vision Software SDKs
- FCC, CE, KC and EU & China ROHS compliant

Feature Rich CLHS Acquisition and Processing

Building on the field proven Teledyne DALSA's Xtium family of frame grabbers, the Xtium™ 2 CLHS PX8 features CameraLink HS standard on the PCI Express™ Gen 3.0 platform. The Xtium2-CLHS supports Active Optical Cable (AOC) and industry standard CX4 cables. This single cable, single slot solution supports up to 7-CLHS lanes, each operating at 10-Gbs, to acquire images at 7.0GB/s and transfer them using PCIe x8 slots at a sustained speed above 6.8GB/s to the host memory.

The Xtium2 CLHS is capable of supporting both the CLHS X and M¹-protocols. The CLHS X-protocol employs 64/66-bit encoding for data transmission to deliver image packets with over 96% efficiency. When combined with 7-lane AOC cables, the Xtium2 CLHS can deliver images at maximum input data rate at cable lengths beyond 30 meters.

In addition, with its integrated data forwarding capabilities, the Xtium2 CLHS PX8 can redistribute incoming data across up to 6 computers in real-time without any additional hardware.

Free Acquisition and Control Software Libraries

Xtium2 series of frame grabbers are fully supported by Spera™ LT-an image acquisition and control software development toolkit (SDK) for Teledyne DALSA's cameras and frame grabbers. Hardware independent in nature, Spera LT offers a rich software development ecosystem for machine vision OEMs and system integrators. Spera LT supports image acquisition from cameras and frame grabbers based on industry standards including GigE Vision™, CameraLink™, CameraLink HS™ and CoaXpress™

Fully Supported By Spera Vision SDK

When combined with Xtium2 series of frame grabbers, the standard Spera Processing run-time licenses are offered at no additional charge. Spera Processing is at the heart of Spera Vision Software Package delivering a suite of image processing and analysis functions. These functions include over 400 image processing primitives, barcode tool, pattern matching tools both area-based and edge-based, OCR, color, blob analysis, measurement and calibration tools for perspective and lens correction. The standard tools run-time license includes access to image processing functions, area based (normalized correlation based) template matching tool, blob analysis and lens correction tools.

XTIUM™ 2 CLHS PX8

A High-Performance Frame Grabber for PCIe Gen3 Platform

Xtium2-CLHS Specifications²

Card	• Half-length PCIe x8 card • PCIe Rev 3.0 compliant
Acquisition	• Area scan and line scan • Acquisition rate up to 7.0GB/s • Host transfer up to 6.8GB/s
CLHS	• CLHS 1 to 7 lane configurations • Single AOC or CX4 cable input from camera • Support for CLHS acquisition trigger modes 1 through 4
Features	• Image Cropping • User programmable 3x3 filter¹ • Horizontal and vertical image flip • Data forwarding across multiple boards and PC for distributed image processing • Multiple board synchronization grab from multiple camera and multiple frame
Resolution	• Horizontal size: 64 bytes to 16 Kbytes • Vertical size: 1 line to 16 million lines
On-Board Memory Buffer	• 512 MB image buffer
Pixel Format	• Mono8, Mono10, Mono12 and Mono16
Controls	• Comprehensive event notification • Timing control logic for camera trigger, line scan direction and strobe signals • Camera control through GenCP/SFNC
Connectors	• 1 x CX4 thumbscrew connector for incoming data from camera • 1 x CX4 thumbscrew connector for data forwarding • DH60-27P for Board Trigger, Strobe and General I/Os (main bracket) • 16-pin connector on the board for Board Sync and/or other usage
LED	• 3 LEDs to report error conditions and acquisition status • LED to follow CLHS standard
Certification	• FCC Class A • CE, KC • EU & China RoHS
Software	• Supported by Sapera Vision SDK packages • Sapera LT and CamExpert • Sapera Essential • Microsoft Windows 7, Windows 8/8.1, Windows 10 32/64-bit, WOW64 and Linux¹
Temperature and storage	• 10°C (50°F) to 50°C (122°F) • Relative Humidity – up to 90% (non-condensing)
Dimensions	• 11.11cm (4.375") length x 9.96cm (3.9240") height

¹ Contact Teledyne DALSA sales for availability

² Specifications subject to change without notice

www.teledynedalsa.com

Americas
 Boston, USA
 +1 978-670-2000
sales.americas@teledynedalsa.com

Europe
 Krailling, Germany
 +49 89-89-54-57-3-80
sales.europe@teledynedalsa.com

Asia Pacific
 Tokyo, Japan
 +81 3-5960-6353
sales.asia@teledynedalsa.com

Shanghai, China
 +86 21-6427-9081
sales.asia@teledynedalsa.com