





**Z3**  
Technology®

# Dual 3G-SDI Camera Encoder

Designed for your Visible & IR Monitoring Needs

## FSDI2-DCK-13

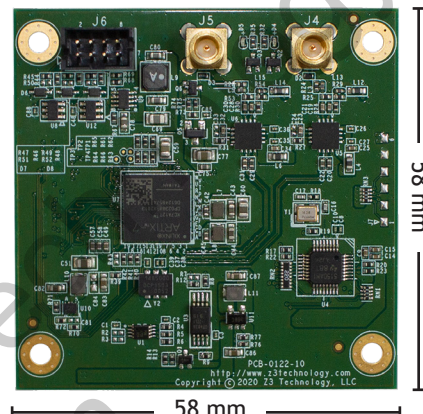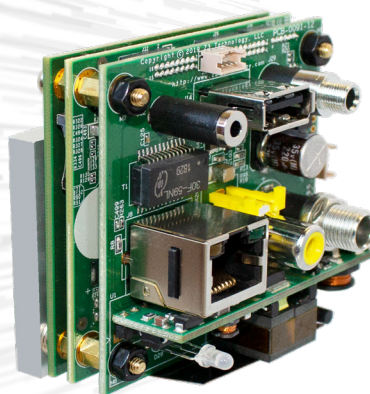

- H.265/H.264 Dual Camera Video Streaming
- Dual 3G-SDI or Single 3G-SDI + Composite
- High Quality Low Latency Encoding
- Camera Control Commands over IP

The FSDI2-DCK-13 is designed for dual SDI camera inspection, surveillance, industrial and UAV applications. The flexibility of the system allows for two SDI cameras or a visible camera and an infrared or night vision camera. The hardware consists of a 3-board set: Input interface, Encoder and Connector PCB. The system is capable of encoding and streaming multiple channels of H.265 and H.264 video in HD resolutions. The Input interface board features flexible digital and analog input ports. The encoder can be configured to stream over IP and simultaneously record to USB or micro SD card.

### Technical

Interfaces	<ul style="list-style-type: none"><li>• 2x 3G-SDI Input</li><li>• 1x Composite Input</li></ul>
Visible Camera Formats	3G-SDI, NTSC/PAL/RS170*
HD and SD IR Formats	SD/HD/3G-SDI or NTSC/PAL/RS170*
Recording	USB or Micro SD
Additional Interfaces	PoE, GigE, Audio Input, RS-485, Composite Output, GPIO, I2C, RS-232
Video Codecs	H.265, H.264
Encoding Resolutions	1080p (up to 60fps), 720p, NTSC/PAL, VGA, CIF and QVGA
Output Formats	RTP, RTSP, MPEG-2 TS and RTMP

Features	<ul style="list-style-type: none"><li>• Low Latency, Low Power</li><li>• Multiple serial connections available</li><li>• Pass Camera Control Commands over IP</li><li>• SRT Modes Supported: Caller, Sender, Rendezvous &amp; SRT Encryption</li><li>• Easy-to-Use HTTP-Based Control Interface</li><li>• ONVIF® Profile S &amp; T</li><li>• Compatible with ZEUS® Video Decoders</li><li>• Simultaneous Streaming and Recording</li><li>• Video Image Preview in the Web Gui</li><li>• KLV Asynchronous and Synchronous Support</li></ul>
----------	--

### Specifications

Encoder Board Size	58 x 58 mm (2.28 x 2.28 in)
Encoder Board Weight	105g (aluminum heat pipe is additional 40g)
Power Consumption	4.5W typical while encoding 2 cameras in H.265 video at 1080p60
Power Supply	12V DC
Operating Temperature	-5°C to +70°C



### ORDERING OPTIONS

#### FSDI2-DCK-13 OEM Production Set

- FSDI2-DCK-13 Encoder Boards

*Note: Camera and cables sold separately*

#### FSDI2-DCK-13-RPS OEM Starter Kit

- FSDI2-DCK-13 Encoder Boards
- Power Supply
- Software SDK
- Documentation
- Serial Cable
- 2x MCX to BNC Cable

*Note: Camera Block sold separately*

### APPLICATIONS


Inspection

Security and Surveillance


Industrial

UAV and Drones

Customized Applications\*

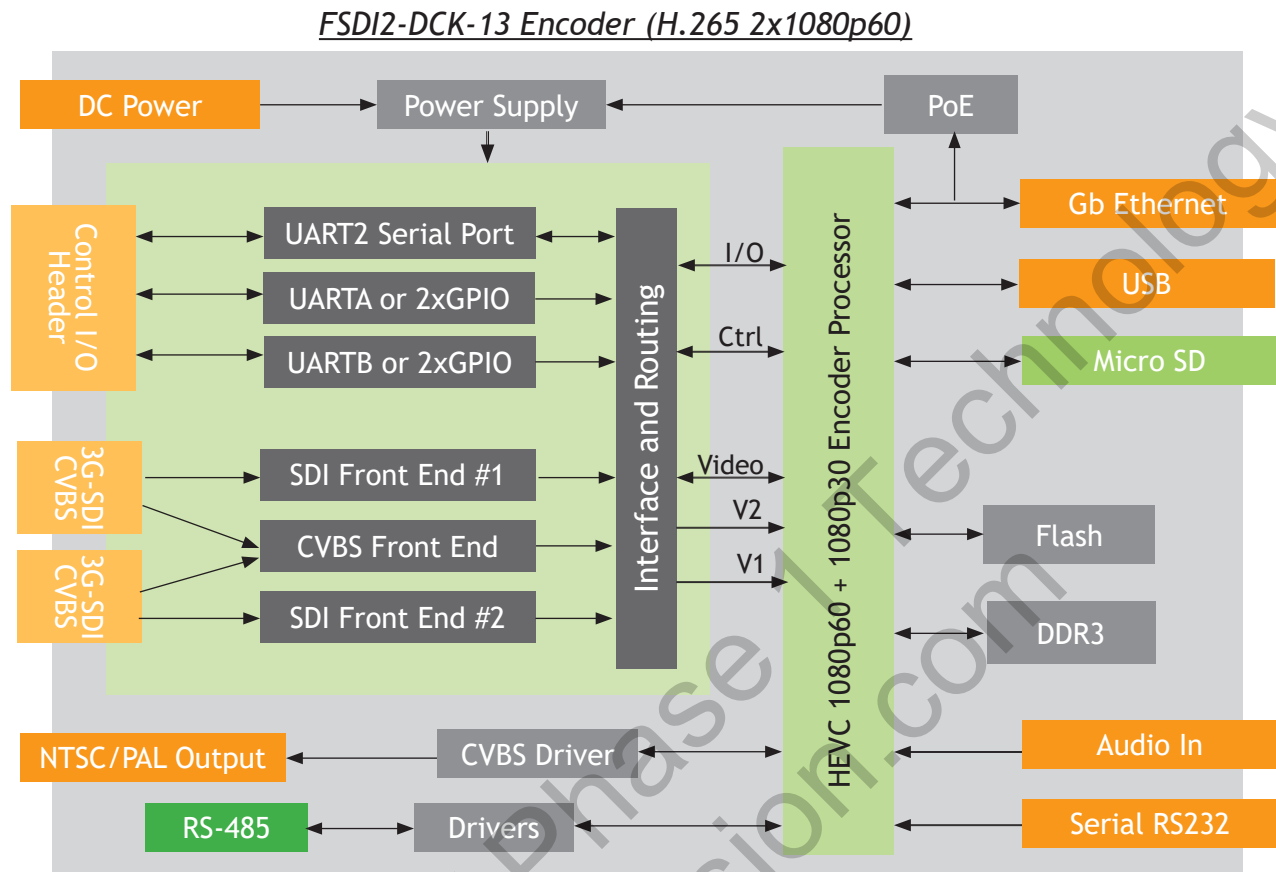

## Use Case

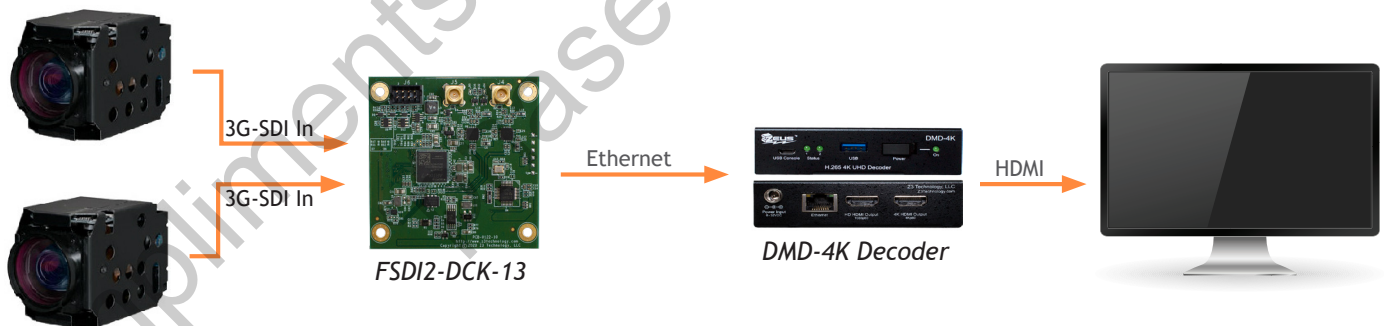

**\*Contact Z<sup>3</sup> Technology for Customized Product Options**  
[sales@Z3technology.com](mailto:sales@Z3technology.com) +1.402.323.0702 [www.Z3technology.com](http://www.Z3technology.com)



Z<sup>3</sup> Technology is an industry-leading, USA-based manufacturer of production-ready embedded multimedia solutions and IP camera systems. From our founders to our world-class engineers to our sales and customer service team, we understand your requirements and speak your language. Our experience allows us to provide cost-effective solutions to meet your multimedia product requirements. With the assistance of our robust worldwide distribution and sales networks, we can provide a simple solution for your multimedia needs.