


21C42S-LL

1080p 60fps Super Sensitive EX-SDI
42mm by 42mm board camera

EX-SDI CVBS




Sony Starvis Exmor R (IMX385)

Features

- 1/2" 2MP Sony CMOS sensor
- 1080p 60fps/30fps, 1080i 60fps, 720p 60fps/30fps
- Real-time True WDR(DOL)
- Digital Noise Reduction(2D+3D)
- Privacy Mask Function
- Digital Image Stabilization
- High Light Compensation
- Intelligent Motion Detection
- Defog Function
- Supports Pelco-P / Pelco-D / VISCA / Update
- Video Out : EX-SDI 1.0, EX-SDI 2.0, EX-SDI 2.1
CVBS, HD-Analog
- Dimension : 42mm X 42mm X 1.2mm

Dimensions

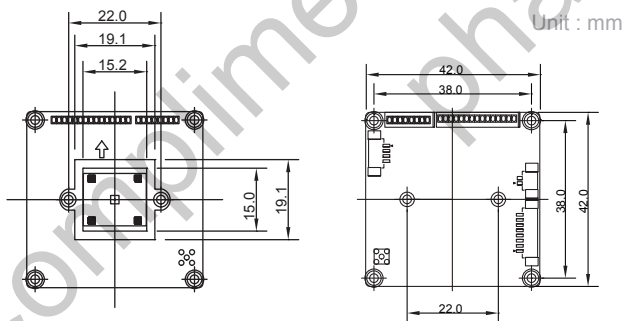

Camera specification

Image Sensor	1/2" Sony CMOS Sensor
Total Pixels	1,952(H) x 1113(V) = 2.17M Pixels
Active Pixels	1,937(H) x 1097(V) = 2.12M pixels
Scanning System	Progressive Sack
Resolution	Digital : 1080p60(50)fps, 1080i60(50)fps, 1080p30(25)fps, 720p60(50)fps, 720p30(25)fps Analog : 700TVL
Min. Illumination	Color(1/30s) : 0.01 lux, BW(1/30s) : 0.002 lux Color DSS(1/1s) : 0.001 lux, BW(1/1s) : 0.0002 lux
Video Output	HD : EX-SDI 1.0, EX-SDI 2.0, EX-SDI 2.1 Analog SD : CVBS, HD-T
Lens	Option
Brightness	0 ~ 20 steps
Shutter Speed	1/30(25) ~ 1/60,000 sec
DSS	Off / x2 / x4 / x8 / x16 / x32(x64 : 60 or 50 fps mode only)
AGC	0 ~ 10 steps
WDR/BLC	Off / WDR / BLC
Day&Night	Auto / Day / Night / Ext-in
White Balance	Auto / One Push / Manual / Indoor / Outdoor / Auto-Ext
HLC	Off / On / Night only
DNR	Off / Low / Middle / High / Auto
Mirror	Off / H / V / H&V
Sharpness	0 ~ 10 steps
ACE	Off / Low / Middle / High
Defog	Off / On (Auto / Manual)
Freeze	Off / On
Digital Zoom	x2 ~ x32
Privacy Mask	Max. 24 Areas
Motion Detection	Max. 3 Areas
Defect Detection	Off / On
System	NTSC / PAL
Communication	ID : 1 ~ 255 Baud Rate : 2400 / 4800 / 9600 / 19200 / 38400 / 57600 / 115200 Protocol : Pelco-P / Pelco-D / VISCA / Update
Language	English / Simplified Chinese / Traditional Chinese / Japanese
Power Source	DC12V±10%
Power Consumption	280mA
Power Input	Connector
Video Output	MMCX Connector
Operating Temperature	-10℃ ~ +50℃ (Humidity : 0%RH ~ 80%RH)
Storage Temperature	-20℃ ~ +60℃ (Humidity : 0%RH ~ 90%RH)
Dimensions	42(W) X 42(H) X 1.2(D)