

HB-5000-G-M Monochrome
HB-5000-G-C Color

*****PRELIMINARY*****



BOLT

25GIGE

High Speed 25GigE SFP28 Interface
2.5x the Speed of 10GigE
Cable lengths from 1M to 10KM
No Fiber Converters Needed
No Frame Grabbers
GigE Vision Compliant



SONY
Pregius

GiGE
VISION
GEN<i>CAM

25GIGE CAMERAS

Speed is Everything.


PRELIMINARY

HB-5000-G SERIES - 5MP


HB-5000-G-M MONOCHROME / HB-5000-G-C COLOR



Spectral Sensitivity

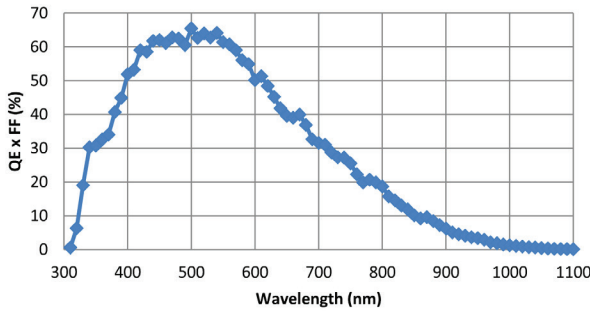

Front View Dimensions



58mm

Side View Dimensions



97mm

*Please refer to 3D Mechanicals available to download from our website for exact measurements

APPLICATIONS

Broadcast Sports Technology
Intelligent Traffic Systems
Food and Beverage Inspection
Diagnostic Analysis
Semiconductor
Automotive
Medical Imaging

Sensor	GMAX2505
Resolution	2600 x 2160
Megapixels	5.61MP
Sensor Type	1/2" CMOS
Max Frame Rate	292 fps
Cell Size	2.5µm x 2.5µm
Standard Mount	C Mount
Shutter	Global
Bit Depth	8 & 12 bit
GPIO / Triggering	3 in, 3 out Software, External (Pulse or Edge)
Interface	SFP28 - 25GigE
Exposure/Integration	5µs-1s
Dynamic Range	>60dB @ 10bit / >65dB @ 12bit
Monochrome Modes	Mono8, Mono12, Mono12Packed
Color Modes	RGB8, RGB12, BGR8, BGR12, YUV411, YUV422, YUV444
Raw Modes	BayerRG8, BayerRG12, BayerRG12Packed
Operating System	Windows 10, Linux (64bit)
Compliance	CE, FCC, RoHS, WEEE, GigE Vision, GenICam
Power Requirements	9W, 12V
Operating Temperature	0C - 45C
Storage Temperature	-30C to +60C
Dimensions & Weight	97 x 58 x 40 - 250g
Warranty	2 Years

*Preliminary data. Subject to change.

EMERGENT VISION TECHNOLOGIES

7-11720 Stewart Crescent
Maple Ridge, British Columbia, V2X 9E7 Canada
Ph: 1-866-780-6082 E-Mail: sales@emergentvisiontec.com
emergentvisiontec.com

