

■ 3072 x 2048

■ 18 fps

Go-X Series 

GiG
VISION

➤ **GOX-6409-PGE** 6.3-megapixel CMOS rolling shutter



- *1/1.8" CMOS imager (rolling shutter with global reset)*
- *Up to 18 fps at full resolution (3072 x 2048)*
- *2.4 µm square pixels*
- *Back-side illuminated (BSI) sensor technology for enhanced low-light performance*
- *8-bit output in choice of monochrome or raw Bayer color models*
- *ROI settings for added flexibility*
- *Horizontal/vertical image flip function, plus blemish correction and shading compensation*
- *Includes Automatic Level Control (ALC) to maintain exposure in dynamic lighting conditions*
- *Compact size with excellent shock and vibration resistance*
- *Accepts power over GigE Vision interface or separate 6-pin connector*
- *C-mount lens mount*




Specifications for GOX-6409-PGE

Go-X Series

Specifications	GOX-6409-PGE
Sensor	1/1.8" CMOS rolling shutter (IMX178)
Active pixels	3072 (h) x 2048 (v)
Frame rate	18 frames/sec. @ 8-bit mono/Bayer
Active area	7.37 mm (h) x 4.91 mm (v) - 8.86 mm diagonal
Pixel size	2.4 μ m x 2.4 μ m
System clock	74.25 MHz (for pulse generator)
Read-out modes	Full ROI (single) Binning
EMVA 1288 Parameters	8-bit output format Mono: TBD p Color: TBD p ($\lambda = 527$ nm) Maximum SNR Mono: TBD dB Color: TBD dB
Traditional SNR*	>60 dB mono, >60 dB color (0 dB gain, 10-bit)
Video signal output	Monochrome: 8-bits Color: 8-bit Bayer
Gain control	Manual/auto 0 dB to +42 dB
White balance	Off, presets, or one-push/continuous AWB
Gamma/LUT	0.45 to 1.0 (9 steps) or 257-point programmable LUT
Synchronization	Internal
Video modes	Normal/Single ROI
Trigger input	Opto In, Pulse Generator, Software, NAND Out (2), User Output (4)
Exposure modes	Timed/EPS, Auto
Electronic shutter	Timed: 16 μ s to 8 s in 1 μ s steps Auto: 100 μ s to 55.5 ms at full resolution
Auto Level Control (ALC)	Shutter range from 100 μ s to 55.5 ms, gain range from 0 dB to +42 dB. Tracking speeds and max. values adjustable.
Shading correction	Flat shading, color shading (color model)
Pre-processing functions	H & V flip (mirroring), blemish compensation, H & V decimation
Operating temp. (ambient)	-5°C to +45°C (20 to 80% non-condensing)
Storage temp. (ambient)	-25°C to +60°C (20 to 80% non condensing)
Vibration	10G (20 Hz to 200 Hz, XYZ directions)
Shock	80G
Regulations	CE(EN 55032:2015(CISPR32:2015), EN 55035:2017(CISPR35:2016)), FCC Part 15 Class A, RoHS/WEEE, KC
Power	6-pin PoE +10V to +25V DC, 2.7 W typical @ +12 V +36V to +57 V DC, 3.7 W typical @ +48 V
Lens mount	C-mount
Dimensions (H x W x L)	29 mm x 29 mm x 51.5 mm
Weight	65 g


Dimensions

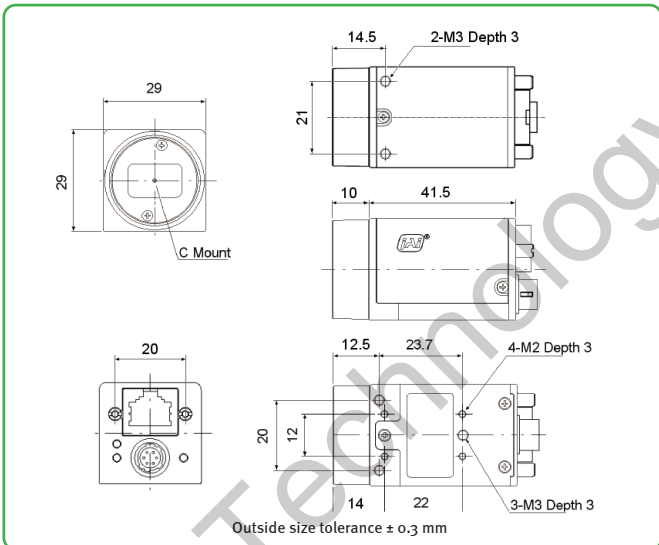

Connector pin-out

DC In / Trigger	GigE Vision Interface																		
HIROSE HR10A-7R-6PB(73)	RJ-45 with locking screws																		
Pin 1 DC in +10V to +25V 2 Opto In+ 3 Opto In- 4 Opto Out+ 5 Opto Out- 6 Ground	<table border="1"> <thead> <tr> <th>Pin</th><th>Signal</th></tr> </thead> <tbody> <tr><td>1</td><td>TRD+ (0)</td></tr> <tr><td>2</td><td>TRD- (0)</td></tr> <tr><td>3</td><td>TRD+ (1)</td></tr> <tr><td>4</td><td>TRD+ (2)</td></tr> <tr><td>5</td><td>TRD- (2)</td></tr> <tr><td>6</td><td>TRD- (1)</td></tr> <tr><td>7</td><td>TRD+ (3)</td></tr> <tr><td>8</td><td>TRD- (3)</td></tr> </tbody> </table>	Pin	Signal	1	TRD+ (0)	2	TRD- (0)	3	TRD+ (1)	4	TRD+ (2)	5	TRD- (2)	6	TRD- (1)	7	TRD+ (3)	8	TRD- (3)
Pin	Signal																		
1	TRD+ (0)																		
2	TRD- (0)																		
3	TRD+ (1)																		
4	TRD+ (2)																		
5	TRD- (2)																		
6	TRD- (1)																		
7	TRD+ (3)																		
8	TRD- (3)																		

Spectral response

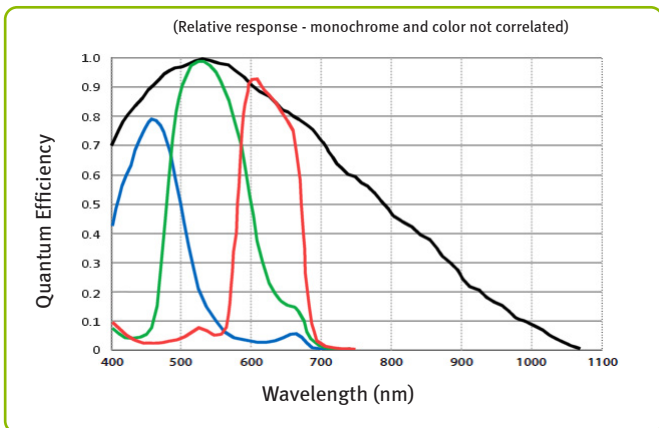

Ordering Information

GOX-6409M-PGE	Monochrome camera with GigE Vision interface
GOX-6409C-PGE	Color camera with GigE Vision interface

*Traditional SNR is based on random noise in a single frame, where EMVA SNR measurements consider more comprehensive noise sources and variance over time.

Europe, Middle East & Africa
Phone +45 4457 8888
Fax +45 4491 8880

Asia Pacific
Phone +81 45 440 0154
Fax +81 45 440 0166

Americas
Phone (Toll-Free) 1 800 445 5444
Phone +1 408 383 0300



Visit our website on www.iai.com

See the possibilities